




The HP large format printing system—the complete solution

HP Designjet and HP Scitex Printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

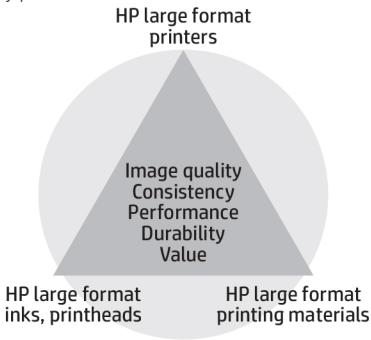

When long-term durability matters, you’re covered

Make sure you’re covered

When you use HP Clear Gloss Cast Overlamine, your prints withstand the demanding conditions of outdoor display from weather to cleaning and the HP Performance Warranty covers image performance, durability, and clean removal up to 5 years.¹

Produce durable, long-term vehicle wraps

Durable, long-term applications—like vehicle wraps—are built to last. HP Clear Gloss Cast Overlamine provides protection from UV radiation, enhances the durability of the underlying graphics, and enables maximum flexibility.

Enjoy easy installation and clean removal

Use HP Clear Gloss Cast Overlamine together with HP Air Release Adhesive Gloss Cast Vinyl. Air release channels make installation easy and prints leave behind little glue residue, so removal is clean and easy, even after 5 years.

Target customers	Applications	Benefits
Print service providers	Signage displayed on curved and flat surfaces	Optimized for use with HP Air Release Adhesive Gloss Cast Vinyl
	Vehicle and fleet graphics	For prints produced on compatible HP Latex, low-solvent, and solvent-ink printers

¹ When used with HP Air Release Adhesive Gloss Cast Vinyl, this solution comes with the HP Performance Warranty. Some warranty limitations apply, see the HP Performance Warranty for HP Air Release Adhesive Gloss Cast Vinyl at HPLFMedia.com/hp/mediawarranties.

Technical specifications

Order online or call
01905 454 598



www.plot-it.co.uk

HP Clear Gloss Cast Overlamine

For the latest ICC profiles/paper presets, please visit HPLFMedia.com/hp/paperpresets.

Weight (without liner)	96 g/m² per ISO 536 Test Method			
Weight (with liner)	138 g/m² per ISO 536 Test Method			
Thickness (without liner)	50 microns/2 mil per ISO 534 Test Method			
Thickness (with liner)	109 microns/4.3 mil per ISO 534 Test Method			
Finish	Gloss			
Display permanence (Outdoor)	5 years laminated with HP Latex Ink²			
Shelf life	2 years, unopened in original packaging			
Lamination	Yes, cold			
Storage temperature	10 to 35° C / 50 to 95° F			
Storage humidity	30% to 70% RH			
Country of origin	Product of United States			
Ordering information	Product Numbers	Roll Sizes	UPC Codes	Region
	CH037A	1372 mm x 45,7 m (54 in x 150 ft)	884962549308	North America, Europe, Asia
	CH036A	1524 mm x 45,7 m (60 in x 150 ft)	884962549292	North America, Europe, Asia
Warranty	HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see HPLFMedia.com/hp/mediawarranties . To obtain warranty service, please contact HP customer support.			

² HP image permanence and scratch, smudge, and water resistance estimates by HP Image Permanence Lab on a range of media including HP printing materials. For more information, see HPLFMedia.com/hp/printpermanence.

For detailed information on the HP large format printing materials portfolio and to order, visit HPLFMedia.com

