

Neschen Product Overview

8/2017



WWW.NESCHEN.COM



HOW TO CONTACT US.

BY PHONE: **+49 (0)5722 2070**
We are at your service: Monday to Thursday from 8 a.m. to 5 p.m.
Friday from 8 a.m. to 3 p.m.

BY POST: Neschen Coating GmbH · Hans-Neschen-Strasse 1
31675 Bückeberg · Germany

BY FAX: **+49 (0)5722 207 197**

BY INTERNET: **www.neschen.com**

BY E-MAIL: **info@neschen.de**

GRAPHICS MEDIA

PROTECTING

FINISHING AND PROTECTION FILMS

- 7 Surface protection films – filmolux®
Smooth surface protection films · Textured surface protection films
Special films · Decoration films · Display and reinforcement films Surface
protection films with solvent-based adhesive

LAMINATING MACHINES

- 13 THE NEW GENERATION
Neschen Coldlam 1650 · Neschen HotLam 1650 TH
Neschen HotLam 1650 DOUBLEH · Neschen EcoLam 1650
Accessories machines

MOUNTING

MOUNTING FILMS

- 14 Double-sided adhesive products – gudy®
Permanent mounting films · Reversible mounting films · Tapes

PRESENTING

INKJET MEDIA

- 18 Media for waterbased inks – printlux®
19 Textiles for waterbased inks – printex and VARItex
20 Media for solvent, eco-solvent, latex and UV curable inks – solvoprint®
Monomeric vinyls · Cling films · Window graphics-films
Glass decoration films · Polymeric vinyls Display media · Paper
wallpaper · PVC flexface
28 Textiles for solvent, eco-solvent, latex and UV curable inks – solvotex
29 Textile for dye sublimation inks – VARItex
29 Textiles for UV curable inks – UVtex
30 Sheet material for UV-offset and screen printing – easy dot® and window-grip
31 Media for UV curable inks – UVprint

ACCESSORIES

- 33 Graphics accessories

DOCUMENTS

PROTECTING

PROTECTIVE AND STRENGTHENING FILMS

35 Book protection films – filmolux® and filmomatt®

DECORATION

38 Self-adhesive Chalkboard film

BOOK REPAIR

39 Paper and textile fabric tapes

ACCESSORIES

41 Accessories Documents

PROCESSING EQUIPMENT

42 Processing devices Documents

MISCELLANEOUS

43 Important information

44 Order form

46 General Terms and Conditions of Business

LEGEND

 = Premium quality

 = Professional quality

 = Economy quality

 = Improved quality

 = Optimal environmental compatibility

 = B1 fire certification

 = M1 fire certification

 = Fire classification according EN 13501-1

 = Hot lamination

 = PAT passed

 = Floor graphics

 = Approval for use in sports facilities in accordance with ISO EN 14904



media: UV dot print 'n' walk

Smooth surface protection films – filmolux®
filmolux® photo  

70 µm or 75 µm soft PVC, monomer, glossy, satin (low reflection) or matt, smooth, transparent, high UV protection, waterbased adhesive with significantly improved adhesion and water-resistance, strong bond and thus suitable for many media printed with UV curable inks, homogeneous surface, for indoor and outdoor applications, two-year Neschen quality certificate

filmolux® photo gloss (70 µm)

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6033584	50	104	41.0	6033587	50	155	61.0
6033585	50	130	51.2				
6033586	50	140	55.0				

filmolux® photo satin (75 µm) 

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6033576	50	104	41.0	6033579	50	155	61.0
6033577	50	130	51.2	6033580*	50	200	78.7
6033578	50	140	55.0				

filmolux® photo matt (70 µm)

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6033599	50	104	41.0	6033602	50	155	61.0
6033600	50	130	51.2	6033603*	50	200	78.7
6033601	50	140	55.0				

*As long as stocks last.

filmolux® PP  

80 µm polypropylene, glossy, satin or matt, smooth, transparent, UV protection, for indoor applications and short- to medium-term outdoor applications, environmentally friendly, suitable for many media printed with UV curable inks, PVC-free

filmolux® PP gloss

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6008723	50	104	41.0	6020666	50	140	55.0
6008507	50	130	51.2	6008724	50	155	61.0

filmolux® PP satin

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6010746	50	104	41.0	6020667	50	140	55.0
6010749	50	130	51.2	6011098	50	155	61.0

filmolux® PP matt

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6008721	50	104	41.0	6020668	50	140	55.0
6008505	50	130	51.2	6008722	50	155	61.0

Smooth surface protection films – filmolux®

filmolux® easy gloss

70 µm economy PVC, monomer, glossy, smooth, transparent, UV protection, for indoor applications and short- to medium-term outdoor applications, M1 fire certification, **recommended as a protective film for the solvoprint® easy range**

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6015841	50	104	41.0	6015843	50	140	55.1
6015842	50	130	51.2	6015844	50	155	61.0

filmolux® easy matt

70 µm economy PVC, monomer, matt, smooth, transparent, UV protection, for indoor applications and short- to medium-term outdoor applications, M1 fire certification, **recommended as a protective film for the solvoprint® easy range**

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6015845	50	104	41.0	6015847	50	140	55.1
6015846	50	130	51.2	6015848	50	155	61.0
6034885	50	137	54.0				

Textured surface protection films – filmolux®

filmolux® easy clear sand

80 µm PVC, monomer, matt, fine sand texture, transparent, scratch-resistant, UV protection, for indoor applications, M1 fire certification, for producing panels, suitable for many media printed with UV curable inks, IFA (Institute for Occupational Safety and health) R9 certified protection film for Floor Graphics Applications in line with our Floor Graphics Instruction for use

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6024270	50	91.4	36.0	6017737	50	140.0	55.1
6017733	50	104.0	41.0	6024273*	50	155.0	61.0
6024271	50	130.0	51.2				

* No certification in the width 155 cm

filmolux® PP sand

140 µm PP, satin, fine sand texture, transparent, scratch-resistant, UV protection, for indoor applications, environmentally friendly, M1 fire certification, ideal for producing panels, dimensionally stable, PVC-free

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6014651	50	91.4	36.0	6014653	50	124.0	48.8
6014652	50	104.0	41.0				

filmolux® scratch

130 µm PET, matt, fine sand texture, transparent, scratch-resistant, UV protection, for indoor applications, M1 fire certification, ideal for producing panels, dimensionally stable (shrink-free PETP film), IFA (Institute for Occupational Safety and health) R10 certified protection film for Floor Graphics Applications in line with our Floor Graphics Instruction for use

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6006026	50	88.0	35	6008487	50	104.0	41
6009878	50	91.4	36				

filmolux® hot scratch 155

88 µm PET compound, heat-activated EVA adhesive, material thickness 155 µm once the adhesive has hardened, PVC-free, satin, fine sand texture, scratch-resistant, for Roll-Ups and Pop-Up display panels

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6005700	50	88	35	6005704	50	104	41

Rolls cannot be cut short.

Textured surface protection films – filmolux®

filmolux® FGS



185 µm soft PVC, polymer, satin, textured surface, transparent, scratch-resistant, high UV protection, for indoor and outdoor applications, IFA (Institute for Occupational Safety and health) R9 certified protection film for Floor Graphics Applications in line with our Floor Graphics Instruction for use, corresponds to the European standard for sports facilities DIN EN 14904: 2006

Order no.	L (m)	W (cm)	Inches
6018033	50	104	41

Order no.	L (m)	W (cm)	Inches
6020665	50	140	55

filmolux® FGS R11



Approx. 140 µm soft PVC film, colourless, polymeric, one-sided self-adhesive, coated with a solvent-free, water-resistant polyacrylate adhesive, permanent bonding, universally applicable for indoor use, outdoor use on roofed floor coverings (e.g. stairs at entrance areas) by sealing the edges, IFA (Institute for Occupational Safety and health) R11 certified protection film for Floor Graphics Applications in line with our Floor Graphics Instruction for use

Order no.	L (m)	W (cm)	Inches
6036103	30	134	53

filmolux® nippon plus



200 µm textured, matt, transparent, monomer soft PVC film, protective film suitable for many media printed with UV curable inks, high UV protection, scratch-resistant surface, short-term indoor applications in line with the floor graphics processing information, IFA (Institute for Occupational Safety and health) R9 certified protection film for Floor Graphics Applications in line with our Floor Graphics Instruction for use

Order no.	L (m)	W (cm)	Inches
6035734	50	137.2	54

Order no.	L (m)	W (cm)	Inches
6034765	50	155.0	61

Special films – filmolux®

filmolux® 2004



25 µm PP-film, glossy, smooth, transparent, UV protection, for indoor applications, environmentally friendly, can be written on with special pens (we recommend Edding 250, Pilot Whitboard Marker) and erased when dry, PVC-free

Order no.	L (m)	W (cm)	Inches
26119	50	124	48.8

filmolux® performance



75 µm PVC, polymer, glossy or matt, smooth, transparent, high UV protection, waterbased adhesive with significantly improved adhesion and water-resistance, strong bond and thus suitable for many media printed with UV curable inks, for medium- to long-term indoor and outdoor applications, very close-fitting, foldable and flexible, Neschen quality certificate: durable for five years

filmolux® performance gloss

Order no.	L (m)	W (cm)	Inches
6030937	50	137.2	54

Order no.	L (m)	W (cm)	Inches
6033233	50	155.0	61

filmolux® performance matt

Order no.	L (m)	W (cm)	Inches
6026026	50	137.2	54

Order no.	L (m)	W (cm)	Inches
6026029	50	155.0	61

Special films – filmolux®

filmolux® S 23

23 µm PET, high-glossy, smooth, transparent, high UV protection, indoor and outdoor applications, protective film for special labels and stickers, dimensionally stable, heat-resistant up to 100°C

Order no.	L (m)	W (cm)	Inches
31098	50	124	48.8

filmolux® UV ultra gloss

50 µm PET, high-glossy, transparent, smooth, very flat glue surface to achieve maximum brilliance and luminosity and to deliver the highest visual quality, anti-graffiti properties, strong adhesion, suitable for many media printed with UV curable inks

Order no.	L (m)	W (cm)	Inches
6035326	50	104	41.0

Order no.	L (m)	W (cm)	Inches
6035028	50	130	51.2

Rolls cannot be cut short.

Decoration films

NEW

solvoprint® glass deco

B1

80 µm translucent, polymeric Soft-PVC in different optics and colours. Decoration- and labelling film on glass surfaces with an effect like etched-glass. "Easy to apply" due to micro-channels in adhesive. Dry apply with reduced adhesive strength minimizes risk of stress-whitening. Suitable for cutting plotters and printable with (eco) solvent, latex- and UV-curable inks. B1 Certificate according to DIN 4102-1. Tips and gimmicks are available on our Homepage.

Order no.	L (m)	W (cm)	Inches
6038507	30	137.2	54 silver
6039784	30	137.2	54 frosted
6039785	30	137.2	54 dusted

Order no.	L (m)	W (cm)	Inches
6039786	20	137.2	54 mint
6039787	20	137.2	54 rose

NEW

Easy dot® Chalkboard black

180 µm black, structured, monomeric PVC-film for writing/drawing with standard or liquid chalk. Writable numerous times and wiped clean with a damp cloth. Easy to apply due to the "easy dot®" technology. Printable with (eco) solvent, latex and UV curable inks. For best printing results we recommend first to print a layer with white ink. Suitable for cutting plotters. Indoor and short term outdoor application as well. Tips and gimmicks are available on our homepage.

Order no.	L (m)	W (cm)	Inches
6038694	10	137.2	54.0
6038695	30	137.2	54.0

Order no.	L (m)	W (cm)	Inches
6039492*	2	68.5	26.9
6039906**	2	68.5	26.9

* shrink wrapped, unit à 25 rolls

** box with chalk and sponge, unit à 20 boxes
Rolls cannot be cut short.



Display and reinforcement films – filmolux®

filmolux® nolite 220*

180 µm PET compound, environmentally friendly waterbased adhesive with strong adhesion, rigid and opaque, white, PVC-free, for Pop-Up displays, ideal for curved side panels

Order no.	L (m)	W (cm)	Inches	
6006172	50	88	35	Rolls cannot be cut short. * While stocks last.

filmolux® H 200 / filmomatt® H 200

200 µm rigid PVC, glossy or matt, smooth, transparent, UV protection, for indoor applications, plasticiser-free, suitable for screen printing and UV-offset printing, not recommended for surface protection

filmolux® H 200 (gloss)

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
25349	50	62	24.4	25351	50	124	48.8

Rolls cannot be cut short.

filmomatt® H 200 (matt)

Order no.	L (m)	W (cm)	Inches	
25369	50	124	48.8	Rolls cannot be cut short.

filmolux® hot nolite 115*

74 µm PET compound, heat-activated EVA adhesive, compound thickness 115 µm once the adhesive has hardened, white, opaque, PVC-free, flexible, for Roll-Up and banner displays

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6007094	50	88	35	6007096	50	104	41

Rolls cannot be cut short. * While stocks last.

filmolux® hot nolite 220

180 µm PET compound, heat-activated EVA adhesive, compound thickness 220 µm once the adhesive has hardened, white, rigid, opaque, PVC-free, flexible, for Pop-Up displays, ideal for curved side panels

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6005711	50	88	35	6005712	50	104	41

Rolls cannot be cut short.

filmolux® hot nolite 320

280 µm PET compound, heat-activated EVA adhesive, compound thickness 320 µm once the adhesive has hardened, white, rigid, opaque, PVC-free, for Pop-Up displays

Order no.	L (m)	W (cm)	Inches	
6008934	50	88	35	Rolls cannot be cut short.

Surface protection films with solvent-based adhesive – solvoclear

solvoclear UV

70 µm monomeric soft PVC, glossy, satin or matt, smooth, transparent, high UV protection, for outdoor applications, strong adhesion, water-resistant adhesive, suitable for many media printed with UV curable inks

solvoclear UV gloss

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6027614	50	104	41.0	6027616	50	140	55.0
6027615	50	130	51.2	6027617	50	154	61.0

solvoclear UV satin

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6027622	50	104	41.0	6027624	50	140	55.0
6027623	50	130	51.2	6027625	50	154	61.0

solvoclear UV matt

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6027618	50	104	41.0	6027620	50	140	55.0
6027619	50	130	51.2	6027621	50	154	61.0

solvoclear easy protect

40 µm OPP film, glossy, smooth, highly transparent, high UV protection, for outdoor applications, strong adhesion, waterbased adhesive, anti-graffiti properties, good value for money

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6005888	50	104	41.0	6029543	50	154	61.0
6029542	50	130	51.2				

NEW

NESCHEN LAMINATORS – THE NEW GENERATION
Neschen ColdLam 1650

Designed for typical everyday applications, the machine is particularly suitable for mounting and laminating of pressure sensitive products up to a width of 1.650 mm

Article number

6037409 ColdLam 1650

Neschen HotLam 1650 TH

The Neschen HotLam 1650 TH has a technically sophisticated roller system with high maximum contact pressure ensuring perfect working results in record time. Working widths 1.650 mm.

Article number

6037411 HotLam 1650 TH

Neschen HotLam 1650 DOUBLEH

A real multi-talented laminator that sets new standards in hot encapsulation applications. High laminating speed. Two sets of main rollers eliminate the need for a 'cooling down' period between hot and cold laminating jobs. Furthermore the Neschen HotLam 1650 DOUBLEH offers a built-in trimmer to cut away overlapping excess media. Working width 1.650 mm.

Article number

6039986 HotLam 1650 DOUBLEH

Neschen EcoLam 1650

The Neschen EcoLam 1650 is perfect for mounting and laminating up to 1650 mm width. Suitable for a lot of different materials, like laminating- and mounting films. Auto-Grip shafts for user friendly material feeding.

Article number

6039985 EcoLam 1650

Accessories machines
Snitty

Safety cutter

Order no.

6040219 unit à 10 pcs

Image Roll Cleaner

to remove old hotmelt glue from roller

Order no.

6022295 1 pcs

Liquid Roll Cleaner

to clean all silicone rollers from dust

Order no.

6034559 1 liter

Double-sided adhesive films · permanent – gudy®
gudy® 802

23 µm polyester, transparent, pH-neutral waterbased adhesive, permanent/permanent adhesive, for indoor and outdoor applications, strong adhesion, one backing, dimensionally stable, premium product

Order no.	L (m)	W (cm)	Inches	Core	Order no.	L (m)	W (cm)	Inches
25082	10	40	15.7	40 mm	39488	50	140	55.0
25547	10	61	24.0	40 mm	6008491	50	155	61.0
25551	50	61	24.0		6008492	100	104	41.0
6008489	50	104	41.0		25603	100	122	48.0
25553	50	122	48.0		6008732	100	130	51.2
6008490	50	130	51.2		100 m rolls cannot be cut short.			

gudy® 8020

12 µm polyester, transparent, pH-neutral waterbased adhesive, permanent/permanent, for indoor and outdoor applications, strong adhesion, one backing, dimensionally stable, premium product

Order no.	L (m)	W (cm)	Inches
6026427	50	200	78.7

gudy® 808

23 µm polyester, white, pH-neutral waterbased adhesive, permanent/permanent, for indoor and outdoor applications, strong adhesion, one backing, dimensionally stable, premium product

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
25030	50	61	24.0	6008496	50	130	51.2
6008495	50	104	41.0	6020674	50	140	55.0
25033	50	122	48.0	6008497	50	155	61.0
Rolls cannot be cut short.							

gudy® 805 universal mount

12 µm PET film, transparent, strong, permanent/permanent, for outdoor application, one backing

Order no.	L (m)	W (cm)	Inches	Core	Order no.	L (m)	W (cm)	Inches	Core
6039524	50	104	41.0	77	6039526	50	140	55.0	77
6039525	50	130	51.2	77	6039527	50	155	61.0	77

gudy® 831


Long-fibre paper, white, pH-neutral, acid free waterbased adhesive, permanent/permanent, for indoor and outdoor applications, very strong adhesion, one backing, suitable for rough surfaces, PAT passed

Order no.	L (m)	W (cm)	Inches	Core	Order no.	L (m)	W (cm)	Inches	Core
26371	10	20.0	7.9	40 mm	6008500	50	104.0	41.0	
26374	10	40.0	15.7	40 mm	26397	50	122.0	48.0	
26386	10	61.0	24.0	40 mm	6008501	50	130.0	51.2	
26387	10	83.0	33.0	50 mm	26383***	30	0.9	0.4	40 mm
6008499	10	104.0	41.0	50 mm	26384**	30	1.9	0.7	40 mm
26395	50	61.0	24.0		26385*	30	3.8	1.5	40 mm

Pack size: *** 20 rolls. ** 10 rolls. * 5 rolls.

Double-sided adhesive films · permanent – gudy®
gudy® 832 Fine Art



Long-fibre paper, white, pH-neutral, permanent/permanent, for indoor and outdoor applications, extra strong adhesion, one backing, for heavy weight structured Fine Art papers, PAT passed

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038864	30.5	61.0	24	6038866	30.5	111.8	44
6038865	30.5	91.4	36	6038867	30.5	127.0	50

Rolls cannot be cut short.

gudy® 870



Thin adhesive film, no carrier, transparent, pH-neutral waterbased adhesive, permanent/permanent, for indoor and outdoor applications, one backing, PAT passed, for flexible and rollable substrates and irregularly shaped print media

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
26460	50	51.5	20.3	26984	50	124.0	48.8
6008502	50	104.0	41.0				

Rolls cannot be cut short.

gudy® dot



Carrier-free easy-dot® technology, pH-neutral waterbased adhesive, permanent, transparent, for indoor applications, one backing, very easy to handle, PAT passed, for bubble-free mounting

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6035157	50	2.5	0.98	6035160	50	140.0	55.0
6035158	50	104.0	41.0	6035161	50	155.0	61.0
6035159	50	130.0	51.2				

Rolls cannot be cut short.

gudy® ultra clear

12 µm polyester, pH-neutral waterbased adhesive, permanent/permanent, for indoor and outdoor applications, two transparent backings, optically clear, high transparency, suitable to mount graphics on/or behind acrylic glass

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038295	50	63.5	25.0	6038293	50	130.0	51.2
6038294	50	104.0	41.0				

Rolls cannot be cut short.

gudy® PP clear


25 µm OPP film, transparent, pH-neutral waterbased adhesive, permanent/permanent, for indoor and outdoor applications, one backing, general-purpose mounting film

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6015837	50	104	41.0	6015839	50	140	55.0
6015838	50	130	51.2	6015840	50	155	61.0

Double-sided adhesive films · reversible – gudy®

gudy® 800

70 µm monomeric soft PVC, transparent, pH-neutral waterbased adhesive, reversible adhesive on both sides, for indoor applications, one backing, can be removed from smooth, suitable for smooth up to lightly porous surfaces, removable without residues

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6008488	50	104.0	41.0	26328*	50	1.3	0.5
25537	50	122.0	48.0	26329*	50	2.0	0.8

* Pack size: 10 rolls

gudy® 804

70 µm monomeric soft PVC, transparent, pH-neutral waterbased adhesive, permanent/reversible, for indoor applications, two backings, can be re-adjusted and removed without residue, easy to handle also by hand, general purpose mounting film, suitable for window applications

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
25911	50	61	24.0	25923	50	122	48.0
6008493	50	104	41.0	6025260	50	130	51.2

gudy® window

23 µm polyester, transparent, pH-neutral waterbased adhesive, permanent/reversible, for indoor applications, two backings, can be re-adjusted and removed without residue, easy to handle also by hand, general purpose mounting film, suitable for window applications

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6025395	50	104	41.0	6026855	50	130	51.2
6000712	50	122	48.0				

Double-sided adhesive tapes – gudy®

gudy® 831

44 µm long-fibre paper, white, pH-neutral waterbased adhesive, permanent/permanent, for indoor and outdoor applications, strong adhesion, one backing, easy to handle, also suitable for rough plastic surfaces, PAT passed

Order no.	L (m)	W (cm)	Inches
26383***	30	0.9	0.4
26384**	30	1.9	0.7

Order no.	L (m)	W (cm)	Inches
26385*	30	3.8	1.5

Pack size: *** 20 rolls. ** 10 rolls. * 5 rolls.

gudy® 800

70 µm monomeric soft PVC, transparent, pH-neutral waterbased adhesive, reversible adhesive on both sides, for indoor and outdoor applications, one backing, suitable for smooth up to lightly porous surfaces, removable without residues

Order no.	L (m)	W (cm)	Inches
26328*	50	1.3	0.5

Order no.	L (m)	W (cm)	Inches
26329*	50	2.0	0.8

* Pack size: 10 rolls.

gudy® dot Tape

easy-dot® technology, transparent, permanent adhesive dots, one backing, PAT passed, for indoor and outdoor applications, general purpose mounting film, easy to apply, PAT passed

Order no.	L (m)	W (cm)	Inches
6035157*	50	2.5	0.98

* Pack size: 10 rolls.

gudy® Roller.dot

Convenient dispenser for handcraft work and office, removable adhesive dots, PAT passed

Order no.	L (m)	W (cm)	Inches
6037803*	10	0.84	0.33

* sales unit 12 pcs in a blister pack minimum order quantity 48 pcs

gudy® DS 10 – reversible on both sides

50 µm monomeric soft PVC, transparent, pH-neutral waterbased adhesive, reversible adhesive on both sides, one backing, can be removed from smooth, solid surfaces

Order no.	L (m)	W (cm)	Inches
6013657	33	1.2	0.5
6013658	33	1.9	0.8

Order no.	L (m)	W (cm)	Inches
6013659	33	2.5	0.9

gudy® DS 11 – reversible/permanent

50 µm monomeric soft PVC, transparent, pH-neutral waterbased adhesive, reversible adhesive on one side and permanent on the other, one backing

Order no.	L (m)	W (cm)	Inches
6013660	33	1.2	0.5
6013661	33	1.9	0.8

Order no.	L (m)	W (cm)	Inches
6013707	33	2.5	0.9

gudy® DS 12 – permanent on both sides

50 µm monomeric soft PVC, transparent, pH-neutral waterbased adhesive, permanent/permanent, one backing

Order no.	L (m)	W (cm)	Inches
6013655	33	1.2	0.5
6013705	33	1.9	0.8

Order no.	L (m)	W (cm)	Inches
6013706	33	2.5	0.9

Self-adhesive media for waterbased inks – printlux®

printlux® PP glossy adh instant dry



120 µm polypropylene, white, glossy, microporous inkjet coating, for indoor applications, environmentally friendly, permanent dark-grey adhesive to prevent the background from showing through, colour fast when pigmented inks are used, for short- to medium-term self-adhesive applications such as trade fair design and POS campaigns, PVC-free

Order no.	L (m)	W (cm)	Inches
6031862	30	106.7	42

Order no.	L (m)	W (cm)	Inches
6031863	30	152.4	60

Rolls cannot be cut short.

printlux® PVC matt adh

80 µm monomeric soft PVC, white, matt inkjet coating, water-resistant, for indoor and outdoor applications, permanent dark-grey adhesive to prevent the background from showing through, colour fast when pigmented inks are used, for short- to medium-term self-adhesive applications such as trade fair design and POS campaigns

Order no.	L (m)	W (cm)	Inches
6030497	30	104.0	41

6030498	30	127.0	50
---------	----	-------	----

Order no.	L (m)	W (cm)	Inches
6030501	30	137.2	54

Rolls cannot be cut short.

Cling film for waterbased inks – printlux®

printlux® window-grip white

125 µm white, matt inkjet coating self-adhesive film, 100 % polyester, can be printed with waterbased inks, pigmented inks recommended, also suitable for latex inks, easy to apply at the place of use, can be removed without any residue at all (even years later), for all smooth surfaces, no loss of adhesion

Order no.	L (m)	W (cm)	Inches
6035447	30	106.7	42

Rolls cannot be cut short.

Display media for waterbased inks – printlux®

printlux® citylight superior

215 µm polyester, white, matt inkjet coating, translucent, water-resistant, scratch-resistant, for indoor and outdoor applications, suitable for latex inks, backlit front-print film for citylight applications and light boxes

Order no.	L (m)	W (cm)	Inches
6031036	30	91.4	36

6031037	30	127.0	50
---------	----	-------	----

Order no.	L (m)	W (cm)	Inches
6031038	30	152.4	60

Rolls cannot be cut short.

printlux® PP nolite 210



Approx. 210 µm polypropylene film, white, matt inkjet coating, scratch-resistant, for indoor applications, environmentally friendly, good flatness, colour fast when pigmented inks are used, very opaque, silver reverse, for Roll-Up and L-Banner display systems, PVC-free

Order no.	L (m)	W (cm)	Inches
6031848	30	91.4	36

6031849	30	106.7	42
---------	----	-------	----

Order no.	L (m)	W (cm)	Inches
6031851	30	152.4	60

Rolls cannot be cut short.

Display media for waterbased inks – printlux®

printlux® nolite 175

175 µm polyester compound, white, matt inkjet coating, water-resistant, scratch-resistant, for indoor and outdoor applications, suitable for latex inks, very good flatness, colour fast when pigmented inks are used, completely opaque, for Roll-Up and L-Banner display systems

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6039833	30	91.4	36	6039835	30	127.0	50
6039834	30	106.7	42	Rolls cannot be cut short.			

printlux® nolite 370

Approx. 380 µm polyester compound, white, matt inkjet coating, scratch-resistant, for indoor applications, good flatness, completely opaque, photorealistic print quality, colour fast when pigmented inks are used, for direct printing of Pop-Up panels for display systems, **recommended lamination films: filmolux® scratch, filmolux® PP sand**

Order no.	L (m)	W (cm)	Inches	Rolls cannot be cut short.
6033407	30	91.4	36	

printlux® easy panel **B1**

430 µm or 310 µm rigid PVC, white, matt inkjet coating, water-resistant, scratch-resistant, for indoor and outdoor applications, B1 fire certification, photorealistic print quality, colour fast when pigmented inks are used, opaque appearance, lamination recommended for improved stiffness and to protect from mechanical damage, 430 µm or 310 µm for direct printing of Pop-Up panels for display systems, 310 µm as side panels for narrow Pop-Up displays, **recommended lamination films: filmolux® scratch, filmolux® PP sand**

printlux® easy panel 430 B1

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6028507	20	91.4	36	6028508	20	106.7	42
Rolls cannot be cut short.							

printlux® easy panel 310 B1

Order no.	L (m)	W (cm)	Inches	Rolls cannot be cut short.
6028509	20	91.4	36	

Textiles for waterbased inks – printex and VARItex

printex easy banner heavy **B1**

220g/m² woven polyester fabric, white, matt inkjet coating, scratch-resistant, for indoor and outdoor applications, B1 fire certification, suitable for latex inks, very good print quality, fabric can be cut using a knife or scissors without fraying, very good flatness, for Pop-Up and L-Banner display systems as well as banners

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6024519	30	91.4	36	6024521	30	127	50
6024520	30	106.7	42	6024523	30	152	60
Rolls cannot be cut short.							

VARItex decoframe 250 **B1 M1**

265g/m² knitted polyester, B1 and M1 fire certifications, suitable for latex inks, for indoor and outdoor applications, for folded fabric and Pop-Up Titanium fabric display systems and banners, inkjet coating, highly versatile as it can be printed with four different types of ink (dye sublimation, latex, UV curable and waterbased pigmented inks), very good flatness

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6031517	30	103.0	40.0	6031519	50	250.0	98.4
6031518	30	152.0	60.0	6031520	50	310.0	122.0
Rolls cannot be cut short.							

Monomeric films for solvent, eco-solvent, latex and UV curable inks – solvoprint®
UV dot print'n'walk

Viscom Award Winner 2015

200 µm white, structured monomeric soft PVC, for indoor applications, fire classification according to EN 13501-1 incl. UV curable inks, R9 certified (IFA) after being printed with UV curable and latex inks, no additional laminating film required, permanent dot-shaped adhesive PE backing (flatness), easy application without bubbles, can be removed from most surfaces without residues in line with the floor graphics processing information, for short-term self-adhesive applications such as POS campaigns or trade fair design

Order no.	L (m)	W (cm)	Inches	
6037895	30	106.7	42	new width
6037897	30	137.2	54	new width

Order no.	L (m)	W (cm)	Inches	
6036727	30	155.0	61	Rolls cannot be cut short.

NEW
UV dot print'n'walk transparent


200 µm transparent, structured monomeric soft PVC, for indoor applications, R9 certified (IFA) after being printed with UV curable inks, no additional film required, permanent dot-shaped adhesive, PE backing (flatness), easy application without bubbles, can be removed from most surfaces without residues in line with the floor graphics processing information, for short-term self-adhesive applications such as POS campaigns or trade fair design

Order no.	L (m)	W (cm)	Inches	
6040068	30	155	61	

solvoprint® easy dot®
B1 M1

100 µm monomeric soft PVC, white, glossy or matt, water-resistant, scratch-resistant, for indoor applications, B1 and M1 fire certifications (glossy and matt), permanent dot-shaped adhesive with air channels between the intermediate adhesive layer, PE backing (flatness), easy application without bubbles, can be removed from most surfaces without leaving residue, for short-term self-adhesive applications such as trade fair design and POS campaigns

solvoprint® easy dot® glossy – improved quality

Order no.	L (m)	W (cm)	Inches	
6039998	50	106.7	42	new width
6030348	50	137.2	54	
6040157	50	155.0	61	new width

Order no.	L (m)	W (cm)	Inches	
6034736*	250	137.2	54	

solvoprint® easy dot® matt – improved quality

Order no.	L (m)	W (cm)	Inches	
6034818	50	106.7	42	
6030349	50	137.2	54	
6034819	50	155.0	61	
6040244	75	106.7	42	25 rolls MOQ
6037456	75	137.2	54	25 rolls MOQ
6040245	75	155.0	61	25 rolls MOQ

Order no.	L (m)	W (cm)	Inches	
6039991*	250	106.7	42	
6034735*	250	137.2	54	
6038056*	250	155.0	61	

* Availability on request, packs contain six rolls, core 152.4 mm (6 inches).

solvoprint® easy dot® whiteout
B1

100 µm monomeric PVC, white, matt with high opacity, permanent adhesive, dot-shaped adhesive coat for easier repositioning, highest colour brilliance, car wrapping is not recommended, dot-shaped glue allows easy and bubble-free positioning, designed for short-term indoor applications like trade shows, seasonal sales, floor graphics, etc.

Order no.	L (m)	W (cm)	Inches	
6038256	50	106.7	42	
6036465	50	137.2	54	

Order no.	L (m)	W (cm)	Inches	
6038257	50	155.0	61	
6040138	75	137.2	54	25 rolls MOQ

Monomeric films for solvent, eco-solvent, latex and UV curable inks – solvoprint®

solvoprint® easy dot® clear – improved quality **B1**

100 µm monomeric soft PVC, transparent, matt surface, water-resistant, scratch-resistant, for indoor applications, B1 fire certification, permanent dotshaped adhesive with air channels between the intermediate adhesive layer, PE backing (flatness), easy application without bubbles, can be removed from most surfaces without leaving residue, for short-term self-adhesive applications such as trade fair design and POS campaigns, also ideal for glass surfaces, mirror inverted printing allows inside mounted window advertising

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6034820	50	106.7	42	6038313	75	137.2	54 25 rolls MOQ
6032517	50	137.2	54	6034734*	250	137.2	54
6034821	50	155.0	61	* Availability on request, packs contain six rolls, core 152.4 mm (6 inches).			

solvoprint® easy dot® transparent **B1**

100 µm monomeric PVC, transparent, glossy surface, permanent adhesive, dot-shaped adhesive coat for easier repositioning, special PVC for printing with solvent-based and latex inks, highest colour brilliance and photorealistic print quality, car wrapping is not recommended, designed for short-term indoor applications like trade shows, seasonal sales, etc., mirror-inverted printing allows inside-mounted window advertising

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038258*	50	106.7	42	6038259*	50	155.0	61
6036692	50	137.2	54				

solvoprint® easy fix® 180 MSP – improved adhesive! **M1**

180 µm white, matt, highly opaque, monomeric soft PVC, water-resistant, scratch-resistant, for indoor and outdoor applications, M1 fire certification, semi-permanent improved adhesive, easy to remove, suitable for latex inks, ideal for short-term advertising on shop windows, trade show walls, doors and other smooth and non-porous surfaces

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6037056	30	137.2	54	6035455	50	137.2	54

solvoprint® easy fix® 150 GSP

150 µm white, glossy, highly opaque, monomeric soft PVC, water-resistant, scratch-resistant, for indoor and outdoor applications, semi-permanent, improved adhesive, easy to remove, suitable for latex inks, ideal for short-term advertising on shop windows, trade show walls, doors and other smooth and non-porous surfaces

Order no.	L (m)	W (cm)	Inches
6036907	50	137.2	54

NEW

Monomeric films for solvent, eco-solvent, latex and UV curable inks – FILMOprint
FILMOprint easy 100 GP nolite B1

100 µm monomeric soft PVC, white, **glossy**, water-resistant, scratch-resistant, for indoor and outdoor applications, B1 fire certification, light grey **permanent** adhesive to prevent shining through of the background, for short-term to mid-term applications such as trade fair design and POS campaigns, recommended lamination films: filmolux® easy gloss/matt

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038470	50	105	41.3	6038471	50	137	53.9
6040351	50	127	50.0	6038472	50	152	59.8

FILMOprint easy 100 MP nolite B1

100 µm monomeric soft PVC, white, **matt**, water-resistant, scratch-resistant, for indoor and outdoor applications, B1 fire certification, light grey **permanent** adhesive to prevent shining through of the background, for short-term to mid-term applications such as trade fair design and POS campaigns, recommended lamination films: filmolux® easy gloss/matt

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038486	50	105	41.3	6038508	50	137	53.9
6040352	50	127	50.0	6038509	50	152	59.8

FILMOprint easy 100 GSP nolite B1

100 µm monomeric soft PVC, white, **glossy**, water-resistant, scratch-resistant, for indoor and outdoor applications, B1 fire certification, light grey **semi-permanent** adhesive to prevent shining through of the background, for short-term applications such as trade fair design and POS campaigns, recommended lamination films: filmolux® easy gloss/matt

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038477	50	105	41.3	6038478	50	137	53.9
6040353	50	127	50.0	6038481	50	152	59.8

FILMOprint easy 100 MSP nolite B1

100 µm monomeric soft PVC, white, **matt**, water-resistant, scratch-resistant, for indoor and outdoor applications, B1 fire certification, light grey **semi-permanent** adhesive to prevent shining through of the background, for short-term applications such as trade fair design and POS campaigns, recommended lamination films: filmolux® easy gloss/matt

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038447	50	105	41.3	6038526	50	137	53.9
6040354	50	127	50.0	6038527	50	152	59.8

Cling film for solvent, eco-solvent, latex and UV curable inks – solvoprint®

solvoprint® window-grip ultra clear

125 µm strong PET film, ultra-clear, good scratch- and water-resistance, for indoor applications, special clear grip coating, PET film backing, for application on glass and other smooth surfaces, can be removed without leaving residue and repositioned at any time, for self-adhesive applications on smooth surfaces

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6035145	50	106.7	42	6035146	50	137.2	54
6034241	30	127.0	50	Rolls cannot be cut short.			

solvoprint® window-grip white

125 µm white self-adhesive cling film, 100% polyester, can be printed with (eco) solvent, latex and UV curable inks recommended, easy to apply at the place of use, can be removed without any residue at all (even years later), for all smooth surfaces, no loss of adhesion

Order no.	L (m)	W (cm)	Inches	Rolls cannot be cut short.
6035446	50	137.2	54	

Polymer films for solvent, eco-solvent, latex and UV curable inks – solvoprint®

NEW

Glass Decoration films – solvoprint® glass deco **B1**

80 µm translucent, polymeric Soft-PVC in different optics and colours. Decoration- and labelling film on glass surfaces with an effect like etched-glass. "Easy to apply" due to micro-channels in adhesive. Dry apply with reduced adhesive strength minimizes risk of stress-whitening. Suitable for cutting plotters and printable with (eco) solvent, latex- and UV-curable inks. B1 Certificate according to DIN 4102-1. Tips and gimmicks are available on our Homepage.

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038507	30	137.2	54	6039786	20	137.2	54
6039784	30	137.2	54	6039787	20	137.2	54
6039785	30	137.2	54				

solvoprint® performance 80 **M1**

80 µm polymeric soft PVC, white, glossy, water-resistant, scratch-resistant, for indoor and outdoor applications, M1 fire certification, permanent adhesive, for long-term self-adhesive applications such as trade fair design and POS campaigns and on both even and slightly curved vehicle surfaces, **recommended lamination films: filmolux® performance gloss/matt**

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6032685	50	106.7	42	6026035	50	155.0	61
6012395	50	137.2	54				

solvoprint® performance 80 nolite

80 µm polymeric soft PVC, white, glossy, water-resistant, scratch-resistant, for indoor and outdoor applications, permanent adhesive, for long-term self-adhesive applications such as trade fair design and POS campaigns and on both even and slightly curved vehicle surfaces, **recommended lamination films: filmolux® performance gloss/matt**

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6017752	50	137.2	54	6026067	50	155.0	61

Polymer films for solvent, eco-solvent, latex and UV curable inks – solvoprint®

solvoprint® performance air-matrix

80 µm polymeric PVC, white, glossy surface, new specially textured backing, small 'air channels' in the permanent dark-grey adhesive, easy application without bubbles, for exterior signs and vehicle advertising on both even and slightly curved surfaces, **recommended lamination films: filmolux® performance gloss/matt**

Order no.	L (m)	W (cm)	Inches		Order no.	L (m)	W (cm)	Inches	
6040179	50	106.7	42	new width	6040178	50	160.0	63	new width
6037066	50	137.2	54						

solvoprint® performance clear 80 M1

80 µm polymeric soft PVC, glossy, transparent, water-resistant, scratch-resistant, for indoor and outdoor applications, M1 fire certification, permanent adhesive, strong PE backing, can also be used as a laminate, for long-term self-adhesive applications such as trade fair design and POS campaigns and on both even and slightly curved vehicle surfaces, **recommended lamination films: filmolux® performance gloss/matt**

Order no.	L (m)	W (cm)	Inches		Order no.	L (m)	W (cm)	Inches	
6032686	50	106.7	42		6026038	50	155.0	61	
6008643	50	137.2	54						

solvoprint® performance backlit

80 µm polymeric soft PVC, white, satin-gloss, translucent, water-resistant, scratch-resistant, for indoor and outdoor applications, permanent adhesive, specially for backlighting – but also looks brilliant in incident light, **recommended lamination films: filmolux® performance gloss/matt**

Order no.	L (m)	W (cm)	Inches
35370	50	124	48.8

NEW

solvoprint® performance wall-grip

100 µm polymeric soft PVC, white, matt, water-resistant, scratch-resistant, high-tack permanent adhesive, especially suitable for rougher or critical surfaces, PE-backing ensures a perfect lay flatness, for indoor and short term outdoor applications

Order no.	L (m)	W (cm)	Inches
6040171	50	155	61

Display media for solvent, eco-solvent, latex and UV curable inks – solvoprint®

solvoprint® citylight superior

210 µm polyester film, white, matt, inkjet coating, translucent, water-resistant, scratch-resistant, for indoor and outdoor applications, 'frontprint' backlit format, exceptional print quality, for use in light boxes – both with and without backlighting

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6033360	30	106.7	42	6031869	30	152.4	60
6031867	30	137.2	54	Rolls cannot be cut short.			

solvoprint® PP nolite 210



Approx. 210 µm polypropylene film, matt, inkjet coating, water-resistant, scratch-resistant, opaque, for indoor and outdoor applications, good flatness, photorealistic print quality, for Roll-Up and L-Banner display systems

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6031852	30	91.4	36	6031854	30	152.4	60
6031853	30	106.7	42	Rolls cannot be cut short.			

solvoprint® nolite 175

175 µm polyester compound, matt, inkjet coating, water-resistant, scratch-resistant, for indoor and outdoor applications, no side curl, good flatness, completely opaque, exceptional print quality, for Roll-Up and L-Banner display systems

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6039830	30	91.4	36	6039832	30	127.0	50
6039831	30	106.7	42	Rolls cannot be cut short.			

solvoprint® nolite 370

Approx. 370 µm polyester compound, matt, inkjet coating, water-resistant, scratch-resistant, for indoor and outdoor applications, very good flatness, completely opaque, photorealistic print quality, for direct printing of Pop-Up panels for display systems, **recommended lamination films: filmolux® scratch, filmolux® PP sand**

Order no.	L (m)	W (cm)	Inches	Rolls cannot be cut short.
6034287	30	91.4	36	

solvoprint® easy panel

430 µm or 310 µm rigid PVC, inkjet coating, water-resistant, scratch-resistant, for indoor and outdoor applications, not recommended for latex inks, B1 fire certification for the 430 µm version, photorealistic print quality, opaque appearance, lamination recommended for improved stiffness and to protect from mechanical damage, 430 µm for direct printing of Pop-Up panels for display systems, 310 µm as side panels for narrow Pop-Up displays, **recommended lamination films: filmolux® scratch, filmolux® PP sand**

solvoprint® easy panel 430 B1



Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6026980	20	91.4	36	6026981	20	106.7	42
Rolls cannot be cut short.							

solvoprint® easy panel 310

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6026982	20	91.4	36	6026983	20	106.7	42
Temperature setting depending on the printer, max. 35°C.							
Rolls cannot be cut short.							

Paper for solvent, eco-solvent, latex and UV curable inks – solvoprint®

solvoprint® paper 240 satin

240 g/m² high-quality photo paper, brilliant white, satin-glossy surface, inkjet coating, homogeneous opacity, for indoor use, environmentally friendly, exceptional print quality, suitable for hot lamination

Order no.	L (m)	W (cm)	Inches
6025065	50	137.2	54

Order no.	L (m)	W (cm)	Inches
6025066	50	152.4	60

Wallpaper for solvent, eco-solvent, latex and UV curable inks – solvoprint®

solvoprint® wallpaper P



295 g/m² PVC-coated wallpaper, five different textured surfaces, water-resistant, scratch-resistant, for indoor applications, B1 fire certification, very good print quality, for wallpaper and wall coverings

Order no.	L (m)	W (cm)	Inches	Texture
6025185	50	130	51.2	classic
6027371	50	130	51.2	smooth
6027092	50	130	51.2	sand

Order no.	L (m)	W (cm)	Inches	Texture
6027090	50	130	51.2	stucco
6027091	50	130	51.2	linen

Rolls cannot be cut short.

solvoprint® wallpaper NW



Approx. 350 g/m² PVC-coated fleece wallpaper, three different textured surfaces, fleece (non-woven) reverse, PVC coating, water-resistant, scratch-resistant, for indoor applications, B1 fire certification, very good print quality, easier to remove from the wall (compared to wallpaper with a paper base), for wallpaper and wall coverings

Order no.	L (m)	W (cm)	Inches	Texture
6026367	50	130	51.2	smooth
6026366	50	130	51.2	sand

Order no.	L (m)	W (cm)	Inches	Texture
6026368	50	130	51.2	stucco

Rolls cannot be cut short.

NESCHEN performance wallpaper smooth



190 g/m² heavy, digital printable non-woven wallpaper, PVC-free, high-quality inkjet coating for solvent-based, latex and UV curable inks, water-resistant, scratch-resistant, for indoor applications, fire classification according to EN 13501-1, environmentally friendly, very good print quality, for interior design and wall coverings

Order no.	L (m)	W (cm)	Inches
6037581	50	106.7	42
6037753	50	155.0	61

Order no.	L (m)	W (cm)	Inches
6037469	50	160	63

NESCHEN performance wallpaper classic / stucco / antique



280 g/m² heavy, digital printable non-woven wallpaper, actually in three different textures, PVC-free, high-quality inkjet coating for solvent-based, latex and UV curable inks, water-resistant, scratch-resistant, for indoor applications, fire classification according to EN 13501-1, environmentally friendly, very good print quality, for interior design and wall coverings

Order no.	L (m)	W (cm)	Inches	Texture
6040016	30	106.7	42	classic
6039703	30	155.0	61	classic
6039449	30	160.0	63	classic

Order no.	L (m)	W (cm)	Inches	Texture
6039288	30	106.7	42	stucco
6038700	30	160.0	63	stucco
6039287	30	106.7	42	antique
6038701	30	160.0	63	antique

Wallpaper for solvent, eco-solvent, latex and UV curable inks – solvoprint®

NEW

NESCHEN performance wallpaper linen


185 g/m² heavy, digital printable non-woven wallpaper, linen texture, PVC-free, high-quality inkjet coating for solvent-based, latex and UV curable inks, water-resistant, scratch-resistant, for indoor applications, fire classification according to EN 13501-1, environmentally friendly, very good print quality, for interior design and wall coverings

Order no.	L (m)	W (cm)	Inches
6038702	30	124	48.8

NESCHEN wallpaper DV 662


Approx. 220 g/m² digital fleece wallpaper, PVC-free, smooth surface, fleece (non-woven) reverse, inkjet coating, water-resistant, scratch-resistant, for indoor applications, fire classification according to EN 13501-1, environmentally friendly, very good print quality, easier to remove from the wall (compared to wallpaper with a paper base), for wallpaper and wall coverings

Order no.	L (m)	W (cm)	Inches
6037097	40	75	29.5

Order no.	L (m)	W (cm)	Inches
6037098	50	150	59.0

Rolls cannot be cut short.

solvoprint® event fleece adh

180 g/m² digital fleece wallpaper, PVC-free, matt, smooth surface, inkjet coating, water-resistant, scratch-resistant, for indoor applications, environmentally friendly, semi-permanent adhesive, very good print quality, especially for trade show walls and other smooth surfaces, improved removability

Order no.	L (m)	W (cm)	Inches
6032266	40	75	29.5

Order no.	L (m)	W (cm)	Inches
6032265	40	150	59.0

Rolls cannot be cut short.

Flexface for solvent, eco-solvent, latex and UV curable inks – FILMOflex®
FILMOflex® blackout 610


Approx. 610 g/m² PVC-coated blackout flexface, smooth, satin-matt, water-resistant, scratch-resistant, for indoor and outdoor applications, B1 and M1 fire certifications, blocks out light, can be printed on both sides, for banners and Roll-Up display systems, very good flatness

Order no.	L (m)	W (cm)	Inches
6030993	30	91.4	36.0
6030995	30	109.0	43.0
6030996	30	137.0	54.0

Order no.	L (m)	W (cm)	Inches
6032112*	50	250.0	98.4
6030997*	50	320.0	126.0

Rolls up to 155 cm wide cannot be cut short.
* Rolled with the printed side facing inward.

FILMOflex® PVC mesh L /mesh


Approx. 270 g/m² PVC-coated mesh flexface (mesh L with liner), water-resistant, scratch-resistant, for indoor and outdoor applications, B1 fire certification, especially for large exterior wall covers, good air permeability

FILMOflex® PVC mesh L

Order no.	L (m)	W (cm)	Inches
6032113	50	152	60.0
6032114	50	205	80.7

Order no.	L (m)	W (cm)	Inches
6032115	50	250	98.4

Rolls up to 152 cm wide cannot be cut short.

FILMOflexflex® PVC mesh

Order no.	L (m)	W (cm)	Inches
6032859	50	320	126.0

Order no.	L (m)	W (cm)	Inches
6032860	50	500	196.9

All media with a width of less than 200 cm are wound printside outside (PO).
all media with a width of more than 200 cm are wound printside inside (PI).

Textiles for solvent, eco-solvent, latex and UV curable inks – solvotex
solvotex art canvas 380

380g/m² polyester and cotton material, white, premium inkjet coating, heavy linen weave, for indoor applications, environmentally friendly, ideal for stretching on frames, for banners and art reproductions

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6036191	30	137	54	6036193	30	155	61

solvotex PES banner 240


260g/m² knitted polyester, for indoor and outdoor applications, fire classification according to EN 13501-1, OEKO-TEX® 100 Standard, framing applications, for folded fabric and Pop-Up Titanium fabric display systems and banners

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6029631	25	105	41.0	6024170	50	205	80.7
6029632	25	137	54.0	6024171	50	250	98.4
6029633	25	155	61.0	6024172	50	310	122.0
Rolls up to 155 cm wide cannot be cut short.				6024173	50	505	198.8

solvotex PES flag plus 2


125g/m² knitted polyester, white, 'plus 2' inkjet coating, scratch-resistant, for indoor and outdoor applications, fire classification according to EN 13501-1, OEKO-TEX® 100 Standard, translucent, almost no cracking, for flags as well as banners and stage decoration

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6015960	100	310	122.0	6015961	100	505	198.8

solvotex TCS flag plus


110g/m² Trevira CS fabric, white, inkjet coating, scratch-resistant, for indoor and outdoor applications, B1 and M1 fire certifications, OEKO-TEX® 100 Standard, translucent, almost no cracking, for flags as well as banners and stage decoration

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6003545	100	310	122.0	6003546	100	505	198.8

solvotex TCS voile plus


45g/m² Trevira CS net fabric, white, inkjet coating, very light linen weave, scratch-resistant, for indoor applications, fire classification according to EN 13501-1 and M1 fire certification, OEKO-TEX® 100 Standard, very light weight, highly translucent, for trade show and stage decoration

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6003557	50	310	122.0	6003558	50	505	198.8

solvotex artist premium light S


200g/m² woven polyester fabric, white, premium inkjet coating, scratch-resistant, for indoor and outdoor applications, fire classification according to EN 13501-1, OEKO-TEX® 100 Standard, for rolling light boxes (e.g. Distex), very good flatness, for trade show banners as well as large-format indoor and outdoor advertising

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6014909	50	205	80.7	6014911	50	310	122.0
6014910	50	250	98.4	6014912	50	505	198.8

All media with a width of **less than 200 cm** are wound printside outside (PO).
all media with a width of **more than 200 cm** are wound printside inside (PI).

Textiles for solvent, eco-solvent, latex and UV curable inks – solvotex

solvotex artist premium heavy S

B1 

300g/m² woven polyester fabric, white, premium inkjet coating, heavy linen weave, scratch-resistant, for indoor and outdoor applications, fire classification according to EN 13501-1, OEKO-TEX® 100 Standard, very good flatness, for trade show banners as well as large-format indoor and outdoor advertising

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6033300	50	106.7	41.0	6014917	50	205.0	80.7
6033301	50	137.0	54.0	6014918	50	250.0	98.4
6033303	50	155.0	61.0	6014919	50	310.0	122.0
Rolls up to 155 cm wide cannot be cut short.				6014920	50	505.0	198.8

All media with a width of **less than 200 cm** are wound printside outside (PO), all media with a width of **more than 200 cm** are wound printside inside (PI).

Textile for direct and transfer printing with dye sublimation ink – VARItex

VARItex decoframe 250 B1

B1 **M1**

265g/m² knitted polyester, B1 and M1 fire certifications, suitable for latex inks, for indoor and outdoor applications, for folded fabric and Pop-Up Titanium fabric display systems and banners, inkjet coating, highly versatile as it can be printed with four different types of ink (dye sublimation, latex, UV curable and waterbased pigmented inks), very good flatness

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6031517	30	103	40.0	6031519	50	250	98.4
6031518	30	152	60.0	6031520	50	310	122.0
Rolls up to 152 cm wide cannot be cut short.							

The VARItex rolls in all widths are wound printside outside (PO).

Textiles for UV curable inks – UVttx

UVttx blackout 290



Approx. 290g/m² knitted polyester, white, PU coating on both sides, very good flatness, for trade show banners, Roll-Up panels and large-format indoor advertising, blocks the light and can be printed on both sides, fire classification according to EN 13501-1

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6033119	50	310	122	6032887	50	505	199

UVttx artist premium heavy

B1

Approx. 250g/m² polyester material, white, light PU bath coating, lets through plenty of light, suitable for tautening on a sail track, also suitable for dye sublimation inks, for indoor and outdoor applications, OEKO-TEX® 100 Standard, B1 fire certification

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6033674	50	250	98.4	6033201	50	505	199.0
6033200	50	310	122.0				

All UVttx media in all widths are wound printside inside (PI).

Sheet material for UV offset and screen printing – easy dot® and window-grip

Neschen easy dot® matt

B1

100 µm monomeric soft PVC, white, good scratch- and water-resistance, for indoor applications, permanent dot-shaped adhesive, PE backing ensures best flatness and the faultless flow of material through UV offset machines and screen printing systems, easy application without bubbles, can be removed from most surfaces without leaving residue, for short-term self-adhesive applications such as trade fair design and POS campaigns, B1 fire certification

Order no.	H (cm)	W (cm)	Pack
6033493	70	100	1000 sheets

Order no.	H (cm)	W (cm)	Pack
6033492	70	100	100 sheets

Neschen easy dot® clear

B1

100 µm monomeric soft PVC, transparent, good scratch- and water-resistance, for indoor applications, permanent dot-shaped adhesive, PE backing ensures best flatness and the faultless flow of material through UV offset machines and screen printing systems, easy application without bubbles, can be removed from most surfaces without leaving residue, for short-term self-adhesive applications such as trade fair design and POS campaigns, highly suitable for application on glass surfaces ('frosted glass' effect), B1 fire certification

Order no.	H (cm)	W (cm)	Pack
6033495	70	100	1000 sheets

Order no.	H (cm)	W (cm)	Pack
6033494	70	100	100 sheets

Neschen window-grip ultra clear

100 µm highly transparent cling film, 100 % polyester, can be printed using UV offset or UV screen printing, can be removed without any residue at all (even years later), for all smooth surfaces, no loss of adhesion

Order no.	H (cm)	W (cm)	Pack
6035504	70	100	1000 sheets

Order no.	H (cm)	W (cm)	Pack
6035751	70	100	100 sheets

Neschen window-grip white

100 µm white cling film, 100 % polyester, can be printed using UV offset or UV screen printing, easy to apply at the place of use, can be removed without any residue at all (even years later), for all smooth surfaces, no loss of adhesion

Order no.	H (cm)	W (cm)	Pack
6035818	70	100	1000 sheets

Order no.	H (cm)	W (cm)	Pack
6035823	70	100	100 sheets

Media for UV curable inks – UVprint

NEW

Easy dot® Chalkboard black

180 µm black, structured, monomeric PVC-film for writing/drawing with standard or liquid chalk. Writable numerous times and wiped clean with a damp cloth. Easy to apply due to the "easy dot®" technology. Printable with (eco) solvent, latex and UV curable inks. For best printing results we recommend first to print a layer with white ink. Suitable for cutting plotters. Indoor and short term outdoor application as well. Tips and gimmicks are available on our homepage.

Order no.	L (m)	W (cm)	Inches
6038694	10	137.2	54.0
6038695	30	137.2	54.0

Order no.	L (m)	W (cm)	Inches
6039492*	2	68.5	26.9
6039906**	2	68.5	26.9

* shrink wrapped, unit à 25 rolls
 ** box with chalk and sponge, unit à 20 boxes
 Rolls cannot be cut short.

UV dot print'n'walk


Viscom Award Winner 2015

200 µm white, structured monomeric soft PVC, for indoor applications, fire classification according to EN 13501-1 incl. UV curable inks, R9 certified (IFA) after being printed with UV curable and latex inks, no additional laminating film required, permanent dot-shaped adhesive, PE backing (flatness), easy application without bubbles, can be removed from most surfaces without residues in line with the floor graphics processing information, for short-term self-adhesive applications such as POS campaigns or trade fair design

Order no.	L (m)	W (cm)	Inches	
6037895	30	106.7	42	new width
6037897	30	137.2	54	new width

Order no.	L (m)	W (cm)	Inches
6036727	30	155.0	61

Rolls cannot be cut short

NEW

UV dot print'n'walk transparent



200 µm transparent, structured monomeric soft PVC, for indoor applications, R9 certified (IFA) after being printed with UV curable inks, no additional film required, permanent dot-shaped adhesive, PE backing (flatness), easy application without bubbles, can be removed from most surfaces without residues in line with the floor graphics processing information, for short-term self-adhesive applications such as POS campaigns or trade fair design

Order no.	L (m)	W (cm)	Inches
6040068	30	155	61

UVprint PP easy dot®



100 µm polypropylene film, white, satin finish, smooth media surface, water-resistant, scratch-resistant, for indoor applications, permanent dot-shaped adhesive, PE backing (flatness), easy application without bubbles, can be removed from most surfaces without leaving residue, for short-term self-adhesive applications such as trade fair design and POS campaigns

Order no.	L (m)	W (cm)	Inches
6036926	50	137.2	54

Media for UV curable inks – UVprint

UVprint window-grip ultra clear

100 µm clear self-adhesive cling film, 100% polyester, can be printed using UV curable inks, easy to apply at the place of use, can be removed without any residue at all (even years later), for all smooth surfaces, no loss of adhesion. **Minimum order 1,500 running metres**

Order no.	L (m)	W (cm)	Inches
6035811	100	140	55.1

Order no.	L (m)	W (cm)	Inches
6035812*	250	140	55.1

* Core 6 inches.

UVprint window-grip white

100 µm white self-adhesive cling film, 100% polyester, can be printed using UV curable inks, easy to apply at the place of use, can be removed without any residue at all (even years later), for all smooth surfaces, no loss of adhesion. **Minimum order 1,500 running metres**

Order no.	L (m)	W (cm)	Inches
6035819	100	140	55.1

Order no.	L (m)	W (cm)	Inches
6035820*	250	140	55.1

* Core 6 inches.

UVprint easy panel B1

400 µm rigid PVC, white, matt, water-resistant, scratch-resistant, for indoor and outdoor applications, B1 fire certification, opaque appearance, for direct printing of Pop-Up panels for display systems

Order no.	L (m)	W (cm)	Inches
6031216	50	91.4	36

Depending on the printer, we recommend reducing the UV lamp intensity.

UVprint wallpaper 170

170 g/m² digital printable non-woven wallpaper, PVC-free, recommended for UV curable inks, water-resistant, scratch-resistant, for indoor applications, fire protection according to EN 13501-1, environmentally friendly, very good print quality, for interior design and wall coverings

Order no.	L (m)	W (cm)	Inches
6037044	50	160	63

Accessories

Squeegee

Plastic squeegee to apply lettering

Order no.

33370

Snitty

Safety cutter

Order no.

6040219 Unit à 10 pcs

Plastic hangers

Self-adhesive

Order no.	Units	Ø (cm)
26673	100	2.5

26673 100 2.5

Supports up to 300 g.

Cutting mat

Order no.	L (cm)	W (cm)
6023343	100	200

6023343 100 200

Metal hangers

For foam sheets


Order no.	Units
26677	100

26677 100

Order no.	Units	Ø (cm)
26674	50	4.0

26674 50 4.0

Supports up to 800 g.

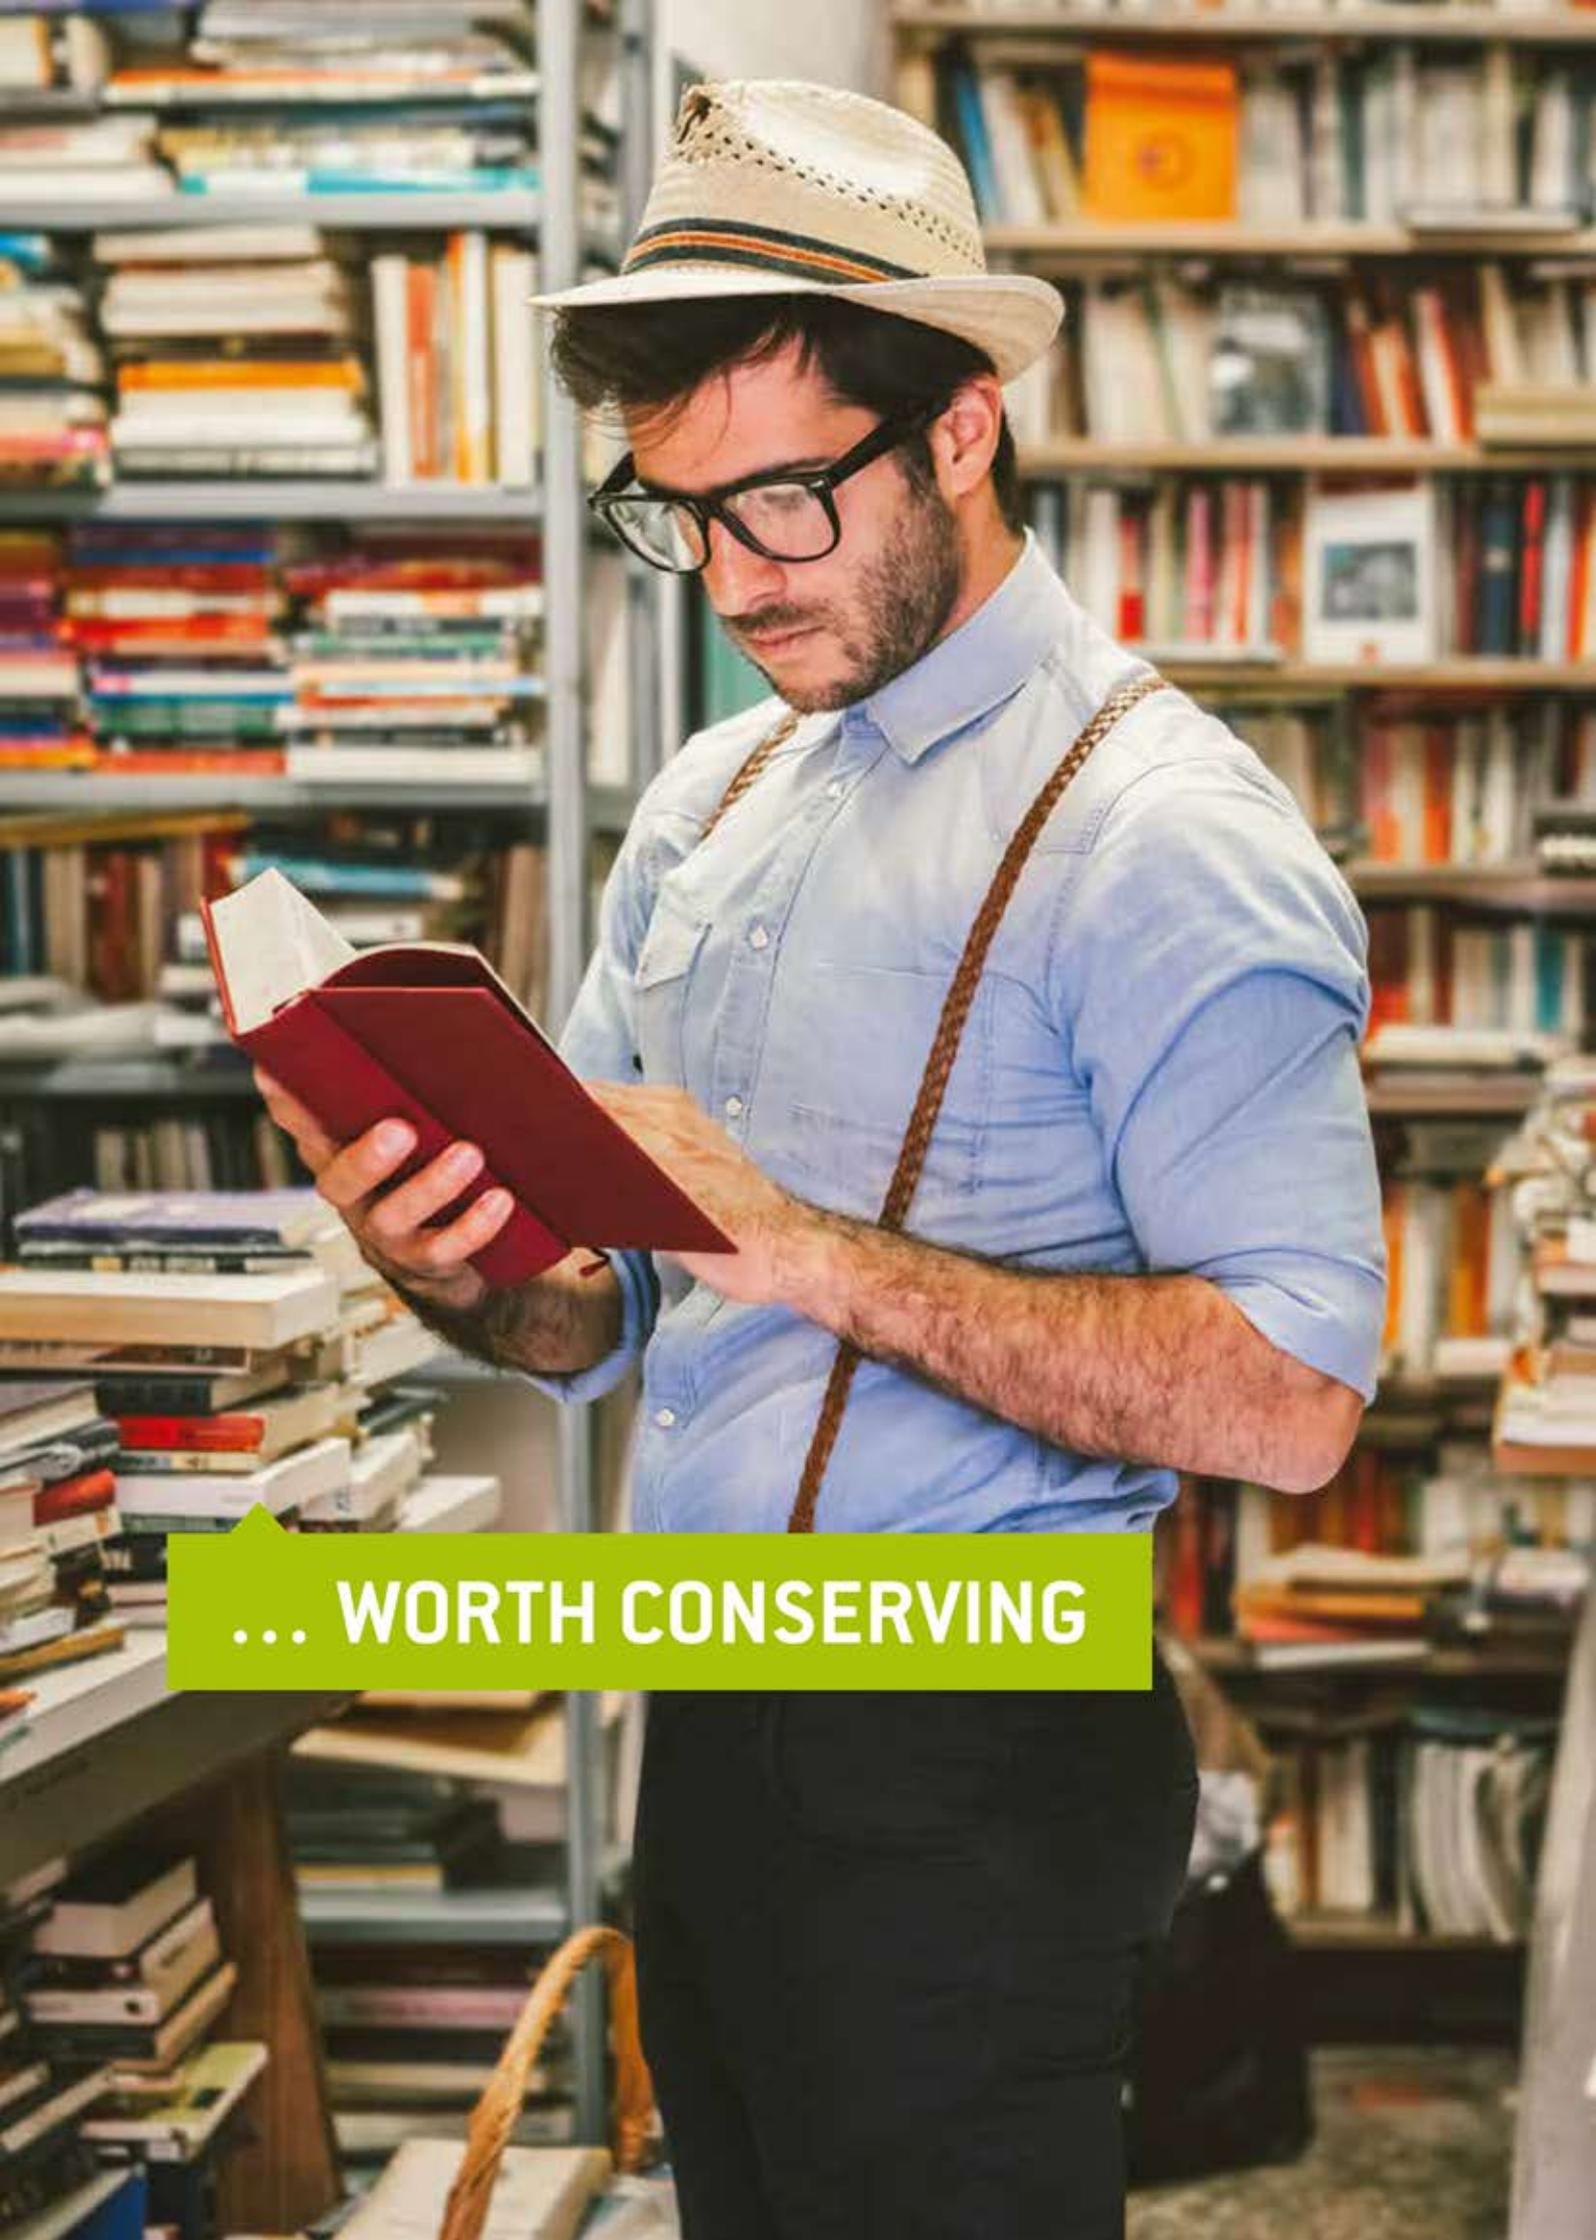

... WORTH CONSERVING

Book protection films with reduced initial adhesion – filmolux®

Thanks to the reduced initial adhesion, these book protection films are easy to adjust in position when applying them to almost any kind of surface. Ideal for smooth surfaces such as paper and glossy covers, brochures, folders, etc.

filmolux®

70 µm soft PVC, glossy, crystal-clear, easy to re-adjust, reduced initial adhesion, silicone paper backing with grid for easy cutting, suitable for use with BLS-Classic and BLS-Professional

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
25161	25	22	25189	25	34
25162	25	24	25167	25	36
25163	25	26	25168	25	41
25164	25	28	25169	25	62
25165	25	30	25049*	25	124
25166	25	32			

* Core 50, film on the outside.

filmolux® soft

70 µm UV-stabilised soft PVC, glossy, crystal-clear, easy to re-adjust, reduced initial adhesion, pre-cut backing made of 100 % recyclable PE with grid for easy cutting, simple, bubble-free application

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
26863	25	20	26869	25	32
26864	25	22	26873	25	34
26865	25	24	26870	25	36
26866	25	26	34474	25	41
26867	25	28	35196	25	50
26868	25	30	30128	25	61

filmolux® soft PP



80 µm PP, glossy, crystal-clear, easy to re-adjust, reduced initial adhesion, pre-cut backing made of 100 % recyclable PE with grid for easy cutting, simple, bubble-free application

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
26280	25	22	26285	25	32
26281	25	24	26286	25	34
26282	25	26	26287	25	36
26283	25	28	26288	25	41
26284	25	30	26289	25	61

Book protection films with high initial adhesion – filmolux®

With their high initial adhesion, these book protection films can be used on almost all book covers. They are also popular as protection films for prints, plans, folders, etc. The narrow rolls are ideal as protection for labels, signatures, bottle labelling in pharmacies and laboratories.

filmolux® 609

70 µm soft PVC, glossy, crystal-clear, high initial adhesion, silicone paper backing with grid for easy cutting, suitable for use with BLS-Classic and BLS-Professional

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
26654	10	32	25146	25	32
26658	10	41	26548	25	34
26660	10	62	25147	25	36
26527*	10	124	25148	25	41
25980	25	2	32477	25	50
25981	25	3	25149	25	62
25982	25	4	26530*	25	124
25983	25	6	26725	50	2
25985	25	10	26726	50	3
25140	25	20	26727	50	4
25141	25	22	26628	50	5
25142	25	24	26728	50	6
25143	25	26	26630	50	8
25144	25	28	26729	50	10
25145	25	30			

* Core 50, film on the outside.

filmolux® 609 label protection

Self-adhesive pre-cut labels on roll

Order no.	Dimensions (mm)	Units/roll	Order no.	Dimensions (mm)	Units/roll
36603	30 × 70	1515	36606	50 × 100	485
36604	30 × 110	1515	36622	46 × 61	1020

filmolux® 610

70 µm soft PVC, glossy, crystal-clear, extra-strong initial adhesion (ideal for adhesive-repellent surfaces such as textiles), silicone paper backing with grid for easy cutting, suitable for use with BLS-Classic and BLS-Professional

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
26600	50	2	26608	25	26
26601	50	3	26609	25	28
26602	50	4	26610	25	30
26603	50	6	26611	25	32
26619	50	8	26612	25	34
26617	50	10	26613	25	36
26606	25	22	26604	25	41
26607	25	24	26615	25	62

Book protection films with high initial adhesion – filmomatt® and filmolux®

filmomatt®

80 µm soft PVC, matt, high initial adhesion, non-reflective, particularly supple, can be folded and written on, silicone paper backing without grid

Order no.	L (m)	W (cm)	Core	Order no.	L (m)	W (cm)	Core
25154	10	41	40 mm	25157	25	62	40 mm
25155	10	62	40 mm	25973*	25	124	50 mm
25970*	10	124	50 mm	6008483	50	130	77 mm
25156	25	41	40 mm				* film outside

filmolux® libre



80 µm PP, glossy, crystal-clear, high initial adhesion, silicone paper backing with grid for easy cutting, suitable for use with BLS-Classic and BLS-Professional

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
28765	25	2	28747	25	28
28766	25	3	28748	25	30
28767	25	4	28749	25	32
28768	25	6	28750	25	34
28769	25	10	28751	25	36
28744	25	22	32896	25	41
28745	25	24	28753	25	62
28746	25	26			

filmomatt® libre



80 µm PP, matt, non-reflective, high initial adhesion, label protection, silicone paper backing with grid for easy cutting

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
26621	50	2	26689	50	6
26622	50	3	26690	50	10
26623	50	4			

Pre-cut sheets – self-adhesive book-covering film – filmolux®

filmolux® bookcover

Combination of 70 µm soft PVC and 180 µm rigid PVC film, glossy, high initial adhesion, silicone paper backing, protection and reinforcement in one product, suitable for use with BLS-Professional

filmolux® bookcover – spine max. 30 mm

Order no.	H (mm)	W (mm)	Pack	Order no.	H (mm)	W (mm)	Pack
6036593	186	270	100 pieces	6036597	258	410	100 pieces
6036594	204	310	100 pieces	6036598	320	510	100 pieces
6036596	222	350	100 pieces				

filmolux® bookcover – spine max. 50 mm

Order no.	H (mm)	W (mm)	Pack	Order no.	H (mm)	W (mm)	Pack
6036599	186	270	100 pieces	6036602	258	410	100 pieces
6036600	204	310	100 pieces	6036603	320	510	100 pieces
6036601	222	350	100 pieces				

Strengthening films – filmolux® and filmomatt®

filmolux® H 200

200 µm rigid PVC film, glossy, film backing with grid for easy cutting

Order no.	L (m)	W (cm)	Core	Order no.	L (m)	W (cm)	Core
25347	10	62	40 mm	25349	50	62	77 mm
25348	10	124	77 mm	38758	21.0 cm x 29.7 cm, 100 cuts		

filmomatt® H 200

200 µm rigid PVC film, matt, film backing with grid for easy cutting

Order no.	L (m)	W (cm)	Core	Order no.	L (m)	W (cm)	Core
25365	10	62	40 mm	25366	10	124	77 mm

Decoration – Self-adhesive Chalkboard film

NEW

Easy dot® Chalkboard black

180 µm black, structured, monomeric PVC-film for writing/drawing with standard or liquid chalk. Writable numerous times and wiped clean with a damp cloth. Easy to apply due to the "easy dot®" technology. Printable with (eco) solvent, latex and UV curable inks. For best printing results we recommend first to print a layer with white ink. Suitable for cutting plotters. Indoor and short term outdoor application as well. Tips and gimmicks are available on our homepage.

Order no.	L (m)	W (cm)	Inches	Order no.	L (m)	W (cm)	Inches
6038694	10	137.2	54.0	6039492*	2	68.5	26.9
6038695	30	137.2	54.0	6039906**	2	68.5	26.9

* shrink wrapped, unit à 25 rolls

** box with chalk and sponge, unit à 20 boxes
Rolls cannot be cut short.

Book repair – filmoplast®

filmoplast® P

20g/m² special paper, short fibre, transparent, ageing-resistant adhesive, buffered with CaCO₃, acid-free, certified by PTS, PAT passed

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)	Pack
25360*	50	2.0	26312	50	1.3	10 rolls
25361	50	4.0	26325	50	2.0	10 rolls
25193	10	40.0				

*dispenser

filmoplast® P 90

50g/m² special paper, long fibre, white, tear-resistant, ageing-resistant adhesive, buffered with CaCO₃, acid-free, certified by PTS, PAT passed

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)	Pack
25454*	50	2.0	26251	50	1.3	10 rolls
26255	50	4.0	26252	50	2.0	10 rolls

*dispenser

filmoplast® P 90 plus

50g/m² special paper, long fibre, white, tear-resistant, ageing-resistant extra strong adhesive, acid-free, PAT passed

Order no.	L (m)	W (cm)
6018639*	50	2

*dispenser

filmoplast® T

240 µm rayon supple tissue tape, acid-free, available in eight colours

Order no.	L (m)	W (cm)	Colour	Colour code	Order no.	L (m)	W (cm)	Colour	Colour code
25404	10	3	Yellow	0384	25465	10	5	Brown	1168
25405	10	5	Yellow	0384	25466	10	8	Brown	1168
25406	10	8	Yellow	0384	25388	10	3	Grey	7038
25384	10	3	Red	2388	25395	10	5	Grey	7038
25391	10	5	Red	2388	25402	10	8	Grey	7038
25398	10	8	Red	2388	25431*	10	124	Grey	7038
25383	10	3	Blue	4276	25387	10	3	White	9500
25390	10	5	Blue	4276	25394	10	5	White	9500
25397	10	8	Blue	4276	25401	10	8	White	9500
25385	10	3	Green	6472	25430*	10	124	White	9500
25392	10	5	Green	6472	25386	10	3	Black	9572
25399	10	8	Green	6472	25393	10	5	Black	9572
25464	10	3	Brown	1168	25400	10	8	Black	9572

*core 50

Book repair – filmoplast®

filmoplast® SH

170 µm fine-threaded, white textile fabric, ageing-resistant strong adhesive, acid-free, highly tear-resistant

Order no.	L (m)	W (cm)	Pack	Order no.	L (m)	W (cm)	Pack
26322	25	1.3	10 rolls	26324	25	3.0	10 rolls
26323	25	2.0	10 rolls	6017094	25	3.0	Single roll

filmoplast® R

8.5 g/m² technical Japanese paper, long-fibre, lignin free, heat-activated plasticizer-free adhesive buffered with MgCO₃, age-resistant, colourless and non-yellowing, high bending-stiffness, certified by PTS, continuous embedding from the roll is possible with the HSM hot-sealing machines.

Order no.	L (m)	W (cm)	Order no.	L (m)	W (cm)
26200	50	2.0	6012831	50	93.0
26201	50	31.0	38514	200	31.0
26202	50	41.0	38687	200	41.0
26203	50	62.0	38078	200	62.0

Accessories

Easy bind® tyvek®

175 µm Tyvek tape, self-adhesive, tear-resistant, backing with central perforation for improved positioning

Order no.	L (m)	W (cm)
35044	30	3.1

Easy wings®

50 µm polyester book spine strengtheners, backing with central perforation for improved positioning

Order no.	Spine	Pack	Order no.	Spine	Pack
35045	up to 5.7 cm	24 pcs.	35046	up to 8.3 cm	24 pcs.

Easy hold®

50 µm polyester strengtheners for magazines, backing with central perforation for improved positioning

Order no.	Pack
35047	250 pcs.

filmolux® pockets

PP, glossy, self-adhesive, triangular

Order no.	Size (mm)	Pack	Order no.	Size (mm)	Pack
25073	75 × 75	24 pcs.	25775	140 × 140	8 pcs.
25075	100 × 100	24 pcs.	25076	140 × 210	8 pcs.

PP, glossy, self-adhesive, rectangular

Order no.	Outside (mm)	Inside (mm)	Pack	Order no.	Outside (mm)	Inside (mm)	Pack
25087	60 × 95	55 × 88	10 pcs.	38588	130 × 130	125 × 120	4 pcs.
37166	102 × 110	92 × 106	4 pcs.				

Accessories

Book glue

Waterbased dispersion adhesive

Order no.	Bottle size
90538	1 kg

Cire 213

Leather care oil

Order no.	Container size
90336	50 ml

Book squeegee

Made of wood with a felt edge

Order no.	Width
36876	16 cm

Felt squeegee

Off-white, one long side angled at 45°

Order no.	Dimensions	Order no.	Dimensions
6032661	130 mm x 70 mm x 8 mm	6032662	75 mm x 45 mm x 8 mm

Teflon burnishing bone, 15 cm long

Order no.
6003796

Burnishing bone (made of bone), 15 cm long

Order no.
37325

Processing equipment

BLS-Classic

Book lamination station

Order no.

6009695 BLS-Classic

6009697 Replacement knife

Order no.

6009696 Additional roll holder

6009698 Set of Teflon strips

BLS-Professional

Professional book lamination station

Order no.

6033951 BLS-Professional

6034431 Cone set

Order no.

6032180 Replacement cutter head

TA3 tape dispenser

Sturdy tape dispenser for single-sided adhesive products, accommodates two rolls

Order no.

6031680 TA3

TA tape dispenser replacement blades

Order no. Pack For equipment

6025254 1 unit à 10 pcs. TA

Order no. Pack For equipment

6010265 1 pcs. TA2 and TA3

Heat sealing machines

For double-sided embedding with filmoplast® R

Order no. Working width

6034544 HSM 340 340 mm

Order no. Working width

6034545 HSM 630 620 mm

Heating iron

For processing narrow filmoplast® R rolls, temperature settings up to 220°C

Order no.

6015972 RT heating iron

Important information

Please note

Please read the processing information and technical information at www.neschen.com.

Notes on cutting materials – graphics

It is only possible to cut products rolled around a core with a diameter of 77 mm. The minimum width that can be cut is 5 cm, and a tolerance of 2 mm must be accepted. For the product gudy® 804, the minimum width that can be cut is 15 cm. Customisation is possible subject to a minimum order quantity.

The following products cannot be cut or shortened:

filmolux® hot scratch 155	all printex materials	solvoprint® nolite 370
filmolux® UV ultra gloss		solvoprint® easy panel 430 B1 (430 µm)
filmolux® nolite 220	VARltx decoframe 250 B1 (up to 152 cm wide)	solvoprint® easy panel 310 (310 µm)
filmolux® H 200		
filmomatt® H 200	Easy dot® Chalkboard black	solvoprint® wallpaper P
filmolux® hot nolite 220		solvoprint® wallpaper NW
filmolux® hot nolite 320	UV dot print'n'walk	solvoprint® event fleece adh
	UV dot print'n'walk transparent	
gudy® 802 (100 m rolls)		solvoprint® flexface (up to 155 cm wide)
gudy® 870	solvoprint® window-grip ultra clear	
gudy® dot	solvoprint® window-grip white	solvotex textiles (up to 155 cm wide)
gudy® ultra clear	solvoprint® citylight superior	
	solvoprint® PP nolite 210	
all printlux® materials	solvoprint® nolite 175	solvoprint easy dot products

** Notes on B1 fire certification

Important when using our print media indoors and at exhibition centres, airports, railway stations, and similar buildings: Please check with the event organiser or examining institution before production begins to see how or in what form 'flame retardancy' should be proven as per DIN 4102/B1. Please refer to our website for details concerning the status of our media with respect to fire protection. You have the option to download the various B1 certificates at www.neschen.com; alternatively please contact our customer service by phone.

Procedure for handling returns

To make the returns process as quick and easy as possible for you and for us, please note the following procedure with immediate effect:

1. If you feel it is necessary to return goods, please call your responsible Neschen office contact directly or the central help desk on +49 (0)57 222 070. We would be happy to put you through to the right person.

Please have your delivery note and customer number ready to ensure a prompt process.

2. The responsible team member will discuss the return with you.
3. Please package the return safely for transport and clearly mark it with the corresponding return number. This will save time and costs for you and us, and it will speed up the processing of returns.

Please note that we do not accept returns that have not been agreed with our office employees.

General Terms and Conditions of Neschen Coating GmbH Hans-Neschen-Straße 1, 31675 Bückeburg

§ 1 General – Scope of application

- (1) Our terms and conditions of business apply exclusively; customer terms to the contrary to or deviating from our Terms and Conditions shall not be valid unless expressly confirmed by us in writing. Our General Terms and Conditions shall also apply in cases when we deliver the goods or services unconditionally in knowledge of conditions of the customer, standing contrary to or deviating from our conditions.
- (2) All agreements that are concluded between us and the customer for the purposes of executing this contract are set down in writing in this contract.
- (3) Our Terms and Conditions shall apply only to companies in the sense of § 14 of the German Civil Code (BGB).
- (4) Our Terms and Conditions and contracts shall also apply to all future business with the customer.

§ 2 Offer – Offer Documents

- (1) If the customer's order is qualified as an offer in accordance with §145 BGB (German Civil Code), we shall be entitled to accept this offer within a period of two weeks.
- (2) We reserve the proprietary rights and copyrights to all illustrations, drawings, calculations and other documents. This shall also apply to written documentation which is classified as 'confidential'. The customer requires our express agreement in writing before passing them on to a third party.
- (3) Details regarding the delivery item or performance (e.g. weight, dimensions, practical value, tolerances, quality, technical data) as well as our representations thereof (e.g. drawings and illustrations) are only approximately applicable, unless its applicability for the purpose contractually envisaged requires precise conformity. Unless explicitly agreed otherwise in individual cases, this information does not represent an assurance, guarantee of characteristics, condition, durability or any other guarantee but only serves to describe or label the delivery or service.
- (4) Differences which are customary in the trade, which are the result of legal provisions or which represent technical improvements well as the replacement of components by equivalent parts or materials are permitted – without consulting the customer – as long as they do not impair the usability of the contractually intended purpose.
- (5) The above shall apply accordingly to the details in our catalogues, brochures and advertisements about dimensions, weights, quality, durability, performance values as well as shipping weights and similar specifications as far as they are quality specification in individual cases; details contained in the order confirmation shall prevail.

§ 3 Prices – Terms of Payment

- (1) Unless the order confirmation states otherwise, our prices are "ex works", exclusive of packaging which shall be charged separately.
- (2) Statutory value added tax shall not be included in the prices; it shall be separately shown on the invoice at the statutory rate on the invoice date.
- (3) Deduction of discount requires a separate written agreement.
- (4) Unless otherwise specified in the order confirmation, the net purchase price shall be due for payment without deduction within 30 days of the invoice date. The legal provisions regarding consequences of delayed payment shall apply.
- (5) The customer shall only be entitled to offsetting rights or rights of retention if his counter-claims have been stated legally binding, undisputed or recognized by our company. In addition, he shall be authorised to exercise a right of retention only to the extent that his counter-claim is based on the same contractual relationship.

§ 4 Delivery time

- (1) Deadlines and dates for deliveries and services apply only approximately unless a fixed deadline or a fixed delivery date is expressly agreed. Where a period of delivery is stipulated, it shall start with the date of the contract confirmation but not before the receipt of all the required documents from the buyer (e.g. specifications, drawings, authorisations, samples, models) and possible releases to be explained by the buyer and clarification of all technical matters.
- (2) The fulfilment of our delivery conditions is subject to the prompt and orderly fulfilment of the obligations on the ordering party. The right to raise objection to non-fulfilment of the agreement is reserved.

- (3) If the customer delays acceptance or otherwise culpably breaches duties of cooperation, we will be entitled to demand the loss we incur to this extent, including any additional expenses, be refunded. Additional claims and rights shall be reserved.
- (4) Insofar as the preconditions of subsection (3) exist, the risk of an accidental loss or the accidental deterioration of the deliveries and services to be provided by us shall pass to the customer at the moment that he is in default of acceptance or payment.
- (5) Should we be late with delivery, the customer shall basically be obliged to set us a reasonable additional period of time for performance after the regular period has been exceeded. If the additional time granted is not complied with, the customer shall be entitled to withdraw from the contract. In consequence of a delay in delivery caused by us, the customer is entitled to enforce the claim that his interest in the further fulfilment of the agreement no longer exists. The customer can withdraw from the contract by immediate written declaration without setting an extension of time. In the event of a partial default the customer may only withdraw from the complete contract if he has a justified interest in refusing the partial delivery. Otherwise, the customer shall have the right to reduce the price accordingly.
- (6) In cases of force majeure and any other disturbing incidents (e.g. every kind of operational disturbances, deferral in transport, strikes, lawful lockouts, governmental actions, difficulties in material or energy procurement, adverse weather conditions as well as non-supply, wrong supply or not in time by our distributors), which were not predictable at the time of conclusion of the contract and are not our fault but hamper the shipment or performance basically or eliminate it, qualify the seller to withdrawal if the challenge is permanent and we have not assumed a procurement risk. In the event of withdrawal from the contract, services already rendered shall be reimbursed without delay. § 275 Para. 2 German Civil Code shall remain unaffected.
- (7) In the event of disturbing incidents of temporary nature – also during a delay in delivery – the delivery period shall be delayed or extended by the period of the disturbance plus a reasonable restart period.
- (8) We shall inform the customer immediately about the occurrence of a disturbing incident. The customer may request a declaration from us as to whether we intend to withdraw or to deliver within an appropriate period.
- (9) According to the cases in para. (6), if as a result of the delay of more than one month the client cannot reasonably be expected to accept the delivery, he may cancel the contract by immediate declaration to us.
- (10) We shall be liable according to the legal regulations as far as the applied contract is a firm deal according to §286 subsection 2 no. 4 of the German Civil Code or according to § 376 of the German Commercial Code.
- (11) Furthermore, we shall be liable in accordance with legal provisions for damage claims should the failure to deliver be founded on a wilful or grossly negligent breach of contract for which we are responsible; negligence on the part of our representatives or vicarious agents is to be attributed to us. Should the delivery delay be founded on an intentional or grossly negligent contractual violation on our part, our liability is limited to the foreseeable and usually occurring damages.
- (12) We shall also be liable in accordance with the legal provisions for damage claims if and where such delay in delivery for which we are to blame results from culpable violation of any contractual obligation; in this case our liability is limited to the foreseeable and usually occurring damages.
- (13) Claims for damages are excluded in the cases referred to in para. (6).

§ 5 Transfer of Risk – Cost of Packaging

- (1) Unless arising otherwise from the order confirmation, delivery 'ex works' has been agreed.
- (2) The return of packaging materials is subject to separate agreements.
- (3) Insofar as the customer requires, we will cover the shipment with a transport insurance; the costs incurred to this extent will be borne by the customer.
- (4) We are entitled, to a reasonable extent, to make partial and early deliveries.

§ 6 Liability for defects

- (1) Customer claims arising from defects assume that the customer has, in accordance with § 377 of the German Commercial Code, duly satisfied his duty to examine the delivery item.
- (2) Insofar as the purchased item is defective, we at our discretion shall be entitled to make subsequent performance in the form of remedying the defect or delivering a new defect-free item. If removal of defects or replacement delivery takes place, we

are obligated to assume all necessary expenses for the purpose of supplementary performance, especially transportation, shipping, labour, and material costs, insofar as these do not increase because the purchased object is brought to a different location than the place of fulfilment.

- (3) If the subsequent performance is unsuccessful, the customer shall be entitled to demand rescission or a price reduction at his option.
- (4) We are liable within the legal provisions, as far as the customer asserts a claim on compensation which is based on intention or gross negligence of us or intention or gross negligence of our representatives or vicarious agents. As far as we are not accused of wilful breach of contract, our liability for claims for damages is limited to the foreseeable, typically occurring damage.
- (5) We shall be liable according to the statutory provisions if we culpably breach a material contractual obligation; also in this case, the liability is limited to foreseeable losses that typically occur. Para. (7) shall remain unaffected.
- (6) Insofar as the customer holds a claim to compensation for the loss or damage in lieu of performance due to a grossly negligent breach of duty, our liability is limited to foreseeable losses that typically occur. Para. (7) shall remain unaffected.
- (7) In so far as we are liable in principle, this liability shall be excluded – even if this is a case of infringement of obligations essential to the contract.
 - (i) If, in the branch of industry in which the customer is active, the risk that is the cause of the damage that has occurred is usually insured by the customer or if it is customary in the branch for comprehensive insurance to be taken out for the damaged goods;
 - (ii) For claims for compensation collateral to or instead of the service provided, insofar as compensation for indirect or consequential damage is demanded;
 - (iii) For damage that are under the customer's control.

These exclusions may not apply in the case of liability due to gross negligence of our executive bodies, legal representatives or management personnel or if the damage is covered by our product liability insurance or insurance liability.
- (8) Liability for culpable injury to life, limb or health remains unaffected; this also applies to mandatory liability in accordance with the product liability law.
- (9) Unless otherwise regulated in the foregoing, any other legal liability shall be excluded.
- (10) The period of limitation for claims is 12 month, beginning with the transfer of risk. This shall not apply if the purchased object is normally used for a building and has caused the defect.
- (11) The statute of limitations in the event of a delivery recourse according to §§ 478, 479 German Civil Code shall remain unaffected; it is five years, beginning from delivery of the faulty object.

§ 7 Total Liability

- (1) Any additional liability for damages other than as stated in § 6, regardless of the legal nature of the claims made, is excluded. This applies in particular for claims for damages arising from breaches of duty in the conclusion of the contract, on account of other breaches of duty or for material damage on account of tortious claims in accordance with § 823 German Civil Code.
- (2) The limitation according to para. (1) shall also apply in cases where the customer requests compensation for useless expenses instead of claim for damages.
- (3) As far as the liability for compensation against us is excluded or restricted, this shall be valid as well with respect to the personal liability for compensations of our employees, staff members, representatives and vicarious agents.

§ 8 Securing Reservation of Property Rights

- (1) We reserve the right of ownership of the purchased object until all payments due from business transactions with the customer have been received. If the customer acts contrary to contract, in particular if he is in default of payment, we are authorised to take back the sold goods. By taking back the sold goods we withdraw from the contract. After retrieval of the purchased object, we shall be entitled to its utilisation, the revenue from such utilisation must be set off against the customer's liabilities – minus any reasonable costs of utilisation.
- (2) The customer undertakes to treat the purchased object with care; in particular, he undertakes to insure the object against fire and water damage and theft at his own expense, with the insured sum being adequate to cover the replacement value. Should maintenance and inspection work be necessary, the customer must perform such work in good time and at his own expense.

- (3) In the event of seizure or other third party interventions, the customer shall be obliged to inform us immediately in writing so that we can take legal action in accordance with § 771 German Civil Code. To the extent to which the third party shall not be able to reimburse judicial and extra-judicial costs of an action according to § 771 German Civil Code, the customer shall be liable for our loss.
- (4) The customer shall be entitled to resell the purchased goods in the ordinary course of business; however, the customer assigns to us, already now, all demands in the amount of the final commercial invoice (including value-added tax) of our demand that accrue to the customer by reason of the resale to its customer or third party, irrespective of whether the purchased goods are sold with or without processing. The customer shall retain the right of recovery of the debt even after he has assigned the claim to us. Our authority to collect the receivables ourselves shall remain unaffected by this. However, we undertake not to collect the claim as long as the customer fulfils his payment obligations from the proceeds collected, is not in arrears and, in particular, no application for initiation of insolvency proceedings has been filed against the customer or there is no stoppage of payments. However, if this is the case we can request that the customer informs us of the assigned claims and their debtors, provides all information which is necessary for the collection, hands over the relevant documents and informs the debtors (third parties) of the assignment.
- (5) The processing or modification of the purchased object by the customer will always be carried out on our behalf. If the object of sale is indivisibly mixed with other objects not belonging to us, we shall acquire part ownership of the new object in the same ratio as the value of the object of sale (final total of invoice including value added tax) stands to the value of the other objects used at the time they were mixed. The same shall apply for the object resulting through processing as for the object delivered under reserve.
- (6) If the object of sale is indivisibly mixed with other objects not belonging to us, we shall acquire part ownership of the new object in the same ratio as the value of the object of sale (final total of invoice including value added tax) stands to the value of the other objects used at the time they were mixed. If the goods are mixed in such a manner that the customer's object is regarded as the main object, it shall be agreed that the customer shall transfer proportionate co-ownership to us. The customer shall hold the sole ownership or co-ownership on our behalf.
- (7) To secure our claims against him, the customer shall also assign all claims against a third party that accrue to him through the connection of the object of sale to property.
- (8) At the request of the customer, we undertake to release the securities to which we are entitled insofar as the realisable value of our securities exceeds the claims to be secured by more than 10%; we shall be responsible for selecting which securities to release.

§ 9 Place of Jurisdiction – Place of Performance

- (1) If the customer is a merchant in the sense of in the German Commercial Code, a legal entity under public law or a special public-law fund, then our registered office is the exclusive – also international – place of jurisdiction for all disputes arising from this contractual relationship. However, we are also entitled to initiate legal proceedings against the customer at his competent court of justice.
- (2) The laws of the Federal Republic of Germany shall apply under exclusion of UN Purchase Law.
- (3) Unless arising otherwise from the order confirmation, our registered office shall be the place of performance.



Neschen Coating GmbH
Hans-Neschen-Strasse 1
31675 Bückebug

T +49 (0)5722 2070
F +49 (0)5722 207 197
E info@neschen.de

WWW.NESCHEN.COM