




HP Universal Coated Paper



The HP Designjet printing system—the complete solution

HP DesignJet printers, Original HP inks and printheads, Original HP printing materials and HP Scitex printers, are designed to work together as a system to provide reliable, consistent results with every print.

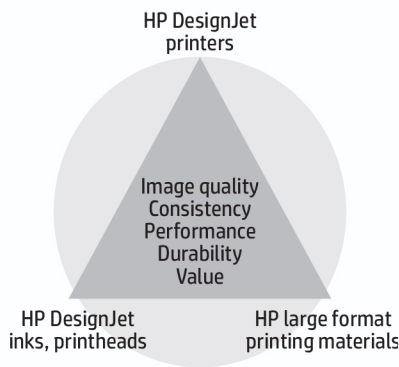

Accomplish more with consistent results

Look to this economical, recyclable¹, and FSC®-certified³ printing material, ideal for a variety of graphics and technical applications from presentations and indoor signs to posters that are frequently replaced. From working comps and design proofs to POP signage and special event posters, see high-quality, consistent image quality print to print and roll to roll.

Make the economical choice for everyday prints

Meet your everyday printing needs and enjoy consistent, high-quality results with this economical matte coated paper.

Add flexibility—this paper is FSC®-certified

Use this high-quality printing material across a broad range of HP Designjet printers. Get added flexibility with this recyclable FSC®-certified paper that supports the development of responsible forest management worldwide.

Target customers	Applications	Benefits
Architects	Posters and presentations	Consistent, high-quality results
Engineers	POP and retail displays	Cost-effective for everyday use
Geographic Information Systems (GIS) professionals	Geographic Information Systems (GIS)	Broad HP Designjet printer compatibility ²
Graphic designers	Architecture (AEC) and engineering (MCAD)	FSC®-certified paper
Print service providers		Recyclable through commonly available programs



Technical specifications

Order online or call
01905 454 598

HP Universal Coated Paper

For the latest ICC/media profiles and a variety of resources to help you get the most out of your printer and HP large format printing materials, please visit HPLFMedia.com.

Weight	90 g/m ² per ISO 536 Test Method, (24 lbs)			
Thickness	124 microns/4.9 mil per ISO 534 Test Method			
Opacity	89% per TAPPI T-425 Test Method			
Brightness	89% per TAPPI T-452 Test Method			
Whiteness	117 per CIE Ganz 82 Test Method			
Finish	Matte			
Operating temperature	15 to 30° C / 59 to 86° F			
Operating humidity	20 to 70% RH			
Dry time	Immediate (at 23° C, 50% RH)			
Shelf life	2 years, unopened in original packaging			
Storage temperature	5 to 40° C / 41 to 104° F			
Storage humidity	10 to 80% RH			
Recyclability	Recyclable through commonly available recycling programs			
Country of origin	Product of France			
Ordering information	Product numbers	Roll sizes	UPC Codes	Region
	Q1404B ²	610 mm x 45,7 m (24 in x 150 ft)	848412013689	Worldwide
	Q1405B ²	914 mm x 45,7 m (36 in x 150 ft)	848412013696	Worldwide
	Q1406B ²	1067 mm x 45,7 m (42 in x 150 ft)	848412013702	Worldwide
	Q1408B ²	1524 mm x 45,7 m (60 in x 150 ft)	848412013719	Worldwide
	L5C73A	841 mm x 91,4 m (33 in x 300 ft) (3-in core)	848412016024	Worldwide
	L5C74A	914 mm x 91,4 m (36 in x 300 ft) (3-in core)	848412016031	Worldwide
	SA027B	610 mm x 45,7 m (24 in x 150 ft)	848412014310	Japan, Singapore

Warranty HP large format printing materials are free from defects in materials and workmanship. For warranty statement please see HPLFMedia.com/hp/MediaWarranties.

- 1 Recyclable through commonly available programs.
- 2 Requires 2-inch spindle for compatibility with the Latex 260.
- 3 BMG trademark license code FSC®-C115319, see fsc.org. HP trademark license code FSC®-C017543, see fsc.org. Not all FSC®-certified products are available in all regions. For information about HP large format printing materials, please visit HPLFMedia.com.



The mark of responsible forestry
Note: Not all FSC®-certified products are available in all regions.

For detailed information on the HP large format print media portfolio and to order, visit HPLFMedia.com

