



NEOLT | 80TH
Factory 1941 - 2021

neolt
Factory



XYmatic *trimplus* **Wallpaper**

WWW.PLOT-IT.CO.UK
Order online or call
01905 454598

MAIN FEATURES

- LCD Touch Screen display with intuitive and easy to use software
- Wallpaper automatic vertical alignment
- Marks reading sensor
- Self-identification and marks learning
- X&Y axis adjustable speed
- Excellent visibility of the cutting area
- Pinch Roll with silent compressor on the machine for material loading
- Up to 10 vertical pneumatic cutting units
- Double loading roll
- Tower Light
- New manual system of vertical cutting units alignment
- Open vertical cutting edges (no paper jam)
- Monolithic machine body
- Plug & Play
- Standard jumbo Roll holder max diameter 400 mm
- Up to 20 Personalized Memories
- Pneumatic system to separate the cutting waste.

MATERIALS

- Paper (also laminated or encapsulated)
- Wallpaper
- Canvas & polyester (with liner)
- Reflective material
- PVC banner
- Vinyl & Self-adhesive vinyl
- Backlit & frontlit display
- Magnetic rubber
- Film polycarbonate
- Special materials to be tested

OPTIONAL

- Vertical single pneumatic cutting unit (max 10)
- Double central pneumatic cutting unit
- Vertical cutting guide laser
- Table extension for copy collection



XYmatic Trimplus Wallpaper




Vertical cutting laser guide
(optional)

Innovative automatic
anti-jam cutting unit



Intuitive and easy
to use software



Tower Light



LCD Display Touch
Screen

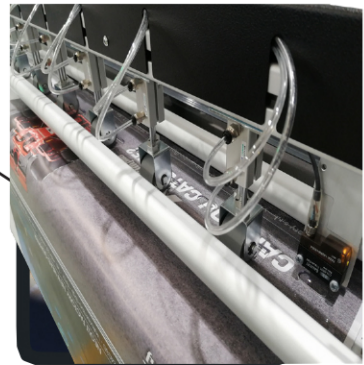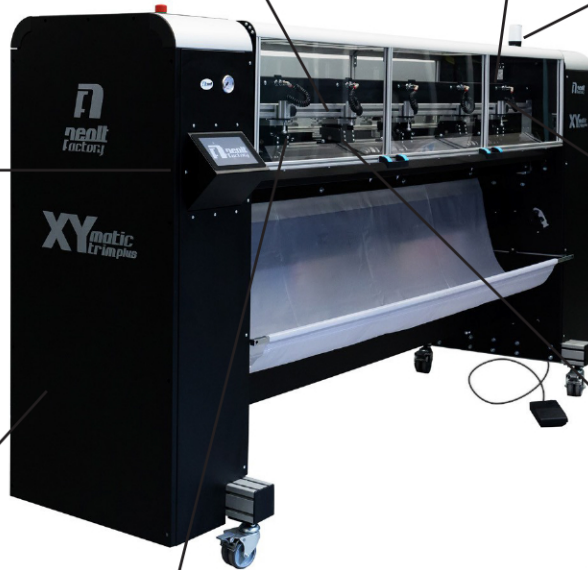

Pneumatic Pinch
Roll




Silent
Compressor
on the machine



Double central
pneumatic cutting
unit (optional)

Painted vertical
pneumatic
cutting units

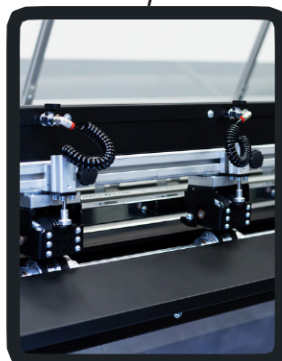

Paper collection
table extension
(optional)

XYmatic trimplus Wallpaper



- X e Y axes alignment
- 2 optical sensors for vertical alignment

• Vertical line control:
The XY TRIM PLUS WALLPAPER reads the printed vertical marks along the roll length and automatically adjusts the media to ensure a perfect and straight wallpaper cut.



TECHNICAL INFO	XY MATIC TRIM PLUS
Width	1650 mm
Cutting thickness	
AXIS X	1,2 mm max
AXIS Y	0,5 mm max
Feed rate	1-50 m/minute
Cutting unit max	10 vertical blades
Cross cutting speed	1-150 m/minute
Power supply	230V - 50Hz - 650W
Maximum roll capacity wallpaper	70 kg



NeoltFactory srl
Sede Operativa: Via Italia, 6 - 24030
Valbrembo (Bergamo) ITALY
Tel: 035468811 Fax: 035468886
www.neoltfactory.com



You can also find us on the major social networks

